

piINLINE® vacuum generator MICRO Xi, 4-4 mm, 0122881



- Patented COAX® cartridge technology...
- High vacuum flow capacity in relation to energy consumption.
- Low weight inline design with push-in fittings.
- Quick and easy installation directly on the hose.
- Si/Ti cartridge at 0.6 MPa for extra vacuum flow.
- Bi cartridge for reliability at low feed pressures.
- Ti/Xi cartridge at 0.4/0.5 MPa when high flow and deep vacuum is needed.

一般情報

材質	CuZn, PA, SS, TPE, Al, ニトリルゴム (NBR)
ノイズ レベル	70 – 76 dBA
温度	-10 – 80 °C
重量	10 g

性能

最大供給圧力	0.7 MPa
--------	---------


Vacuum flow

Feed pressure	Air consumption	Vacuum flow (l/s) at different vacuum levels (-kPa)										Max vacuum
MPa	l/s	0	10	20	30	40	50	60	70	80	-kPa	
0.5	0.13	0.24	0.17	0.1	0.06	0.04	0.03	0.02	0.01	0.01	92	

排気時間 (s/l)

Feed pressure	Air consumption	排気時間 (s/l) to reach different vacuum levels (-kPa)										Max vacuum
MPa	l/s	10	20	30	40	50	60	70	80	-kPa		
0.5	0.13	0.49	1.23	2.48	4.5	7.3	11.3	18	28	92		

Dimensional drawings

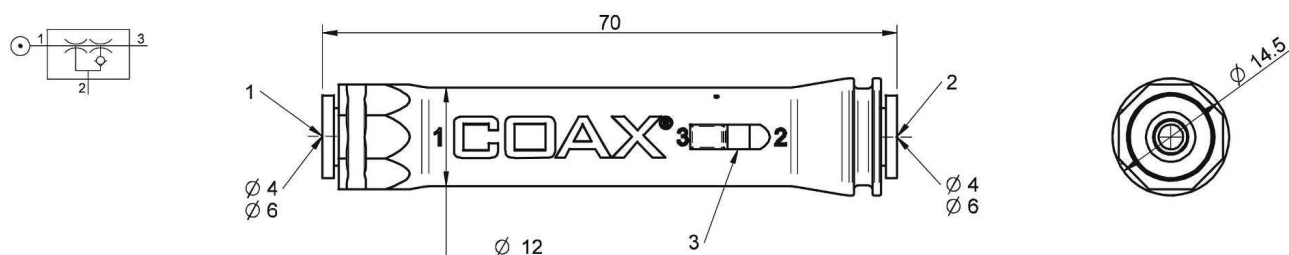

データシートに記されている値は、以下の環境でテストして得られた値です：

室温	(20° C [68° F] ± 3° C [5.5° F])
標準大気圧	(101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg])
相対湿度	0-100%
圧縮空気の品質	DIN ISO 8573-1 class 4

Accessories

	Item no.
Snap-in piINLINE® 5x MICRO mounting bracket	0123093