


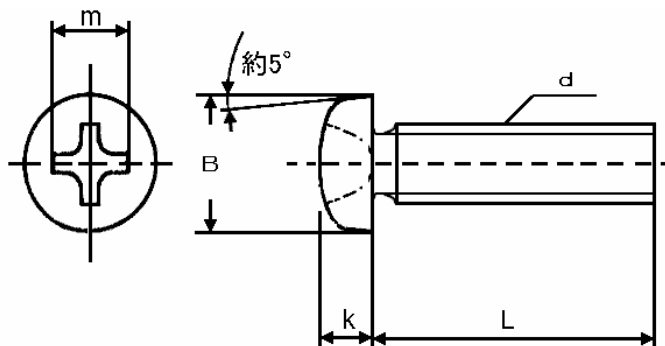

材質：冷間圧造用炭素鋼（SWCH）

表面処理：ユニクロームメッキ

強度：4. 8

品番	ねじの呼び d	長さ L	ピッチ	十字穴番号 m	B	k	品番	ねじの呼び d	長さ L	ピッチ	十字穴番号 m	B	k
B01-0535	M5	35	0.8	2	9	3.3	B01-0675	M6	75	1.0	3	10.5	3.9
B01-0540	M5	40	0.8	2	9	3.3	B01-0810	M8	10	1.25	3	14	5
B01-0545	M5	45	0.8	2	9	3.3	B01-0812	M8	12	1.25	3	14	5
B01-0550	M5	50	0.8	2	9	3.3	B01-0815	M8	15	1.25	3	14	5
B01-0555	M5	55	0.8	2	9	3.3	B01-0816	M8	16	1.25	3	14	5
B01-0560	M5	60	0.8	2	9	3.3	B01-0818	M8	18	1.25	3	14	5
B01-0565	M5	65	0.8	2	9	3.3	B01-0820	M8	20	1.25	3	14	5
B01-0570	M5	70	0.8	2	9	3.3	B01-0822	M8	22	1.25	3	14	5
B01-0575	M5	75	0.8	2	9	3.3	B01-0825	M8	25	1.25	3	14	5
B01-0606	M6	6	1.0	3	10.5	3.9	B01-0830	M8	30	1.25	3	14	5
B01-0608	M6	8	1.0	3	10.5	3.9	B01-0835	M8	35	1.25	3	14	5
B01-0610	M6	10	1.0	3	10.5	3.9	B01-0840	M8	40	1.25	3	14	5
B01-0612	M6	12	1.0	3	10.5	3.9	B01-0845	M8	45	1.25	3	14	5
B01-0614	M6	14	1.0	3	10.5	3.9	B01-0850	M8	50	1.25	3	14	5
B01-0615	M6	15	1.0	3	10.5	3.9	B01-0855	M8	55	1.25	3	14	5
B01-0616	M6	16	1.0	3	10.5	3.9	B01-0860	M8	60	1.25	3	14	5
B01-0620	M6	20	1.0	3	10.5	3.9	B01-0865	M8	65	1.25	3	14	5
B01-0625	M6	25	1.0	3	10.5	3.9	B01-0870	M8	70	1.25	3	14	5
B01-0630	M6	30	1.0	3	10.5	3.9	B01-0875	M8	75	1.25	3	14	5
B01-0635	M6	35	1.0	3	10.5	3.9	B01-1020	M10	20	1.5	4	19	6
B01-0640	M6	40	1.0	3	10.5	3.9	B01-1025	M10	25	1.5	4	19	6
B01-0645	M6	45	1.0	3	10.5	3.9	B01-1030	M10	30	1.5	4	19	6
B01-0650	M6	50	1.0	3	10.5	3.9	B01-1040	M10	40	1.5	4	19	6
B01-0655	M6	55	1.0	3	10.5	3.9	B01-1050	M10	50	1.5	4	19	6
B01-0660	M6	60	1.0	3	10.5	3.9	B01-1060	M10	60	1.5	4	19	6
B01-0665	M6	65	1.0	3	10.5	3.9	B01-1070	M10	70	1.5	4	19	6
B01-0670	M6	70	1.0	3	10.5	3.9							

作成日
2008. 1. 15

検図
中田

TRUSCO トラスコ中山株式会社

品名
ナベ頭小ネジ

品番
B 0 1 - 〇 〇 〇 〇