


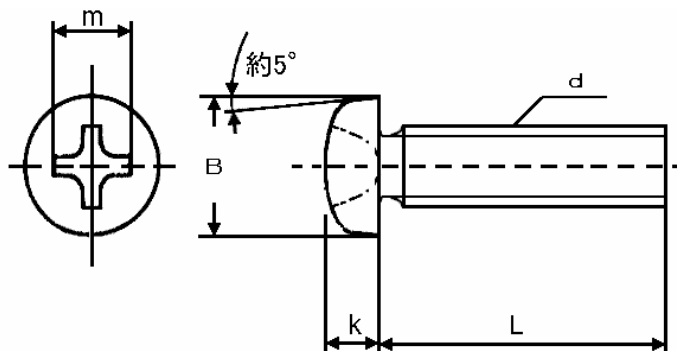

材質：ステンレス（SUS，XM-7）

表面処理：なし

強度：A2-50

品番	ねじの呼び d	長さ L	ピッチ	十字穴番号 m	B	k	品番	ねじの呼び d	長さ L	ピッチ	十字穴番号 m	B	k
B05-0465	M4	65	0.7	2	7	2.6	B05-0618	M6	20	1.0	3	10.5	3.9
B05-0470	M4	70	0.7	2	7	2.6	B05-0620	M6	20	1.0	3	10.5	3.9
B05-0475	M4	75	0.7	2	7	2.6	B05-0625	M6	25	1.0	3	10.5	3.9
B05-0506	M5	6	0.8	2	9	3.3	B05-0630	M6	30	1.0	3	10.5	3.9
B05-0508	M5	8	0.8	2	9	3.3	B05-0635	M6	35	1.0	3	10.5	3.9
B05-0510	M5	10	0.8	2	9	3.3	B05-0640	M6	40	1.0	3	10.5	3.9
B05-0512	M5	12	0.8	2	9	3.3	B05-0645	M6	45	1.0	3	10.5	3.9
B05-0514	M5	14	0.8	2	9	3.3	B05-0650	M6	50	1.0	3	10.5	3.9
B05-0515	M5	15	0.8	2	9	3.3	B05-0655	M6	55	1.0	3	10.5	3.9
B05-0516	M5	16	0.8	2	9	3.3	B05-0660	M6	60	1.0	3	10.5	3.9
B05-0518	M5	18	0.8	2	9	3.3	B05-0665	M6	65	1.0	3	10.5	3.9
B05-0520	M5	20	0.8	2	9	3.3	B05-0670	M6	70	1.0	3	10.5	3.9
B05-0525	M5	25	0.8	2	9	3.3	B05-0675	M6	75	1.0	3	10.5	3.9
B05-0530	M5	30	0.8	2	9	3.3	B05-0810	M8	10	1.25	3	14	5
B05-0535	M5	35	0.8	2	9	3.3	B05-0812	M8	12	1.25	3	14	5
B05-0540	M5	40	0.8	2	9	3.3	B05-0815	M8	15	1.25	3	14	5
B05-0545	M5	45	0.8	2	9	3.3	B05-0816	M8	16	1.25	3	14	5
B05-0550	M5	50	0.8	2	9	3.3	B05-0820	M8	20	1.25	3	14	5
B05-0560	M5	60	0.8	2	9	3.3	B05-0825	M8	25	1.25	3	14	5
B05-0565	M5	65	0.8	2	9	3.3	B05-0830	M8	30	1.25	3	14	5
B05-0570	M5	70	0.8	2	9	3.3	B05-0835	M8	35	1.25	3	14	5
B05-0575	M5	75	0.8	2	9	3.3	B05-0840	M8	40	1.25	3	14	5
B05-0608	M6	8	1.0	3	10.5	3.9	B05-0845	M8	45	1.25	3	14	5
B05-0610	M6	10	1.0	3	10.5	3.9	B05-0850	M8	50	1.25	3	14	5
B05-0612	M6	12	1.0	3	10.5	3.9	B05-0860	M8	60	1.25	3	14	5
B05-0614	M6	14	1.0	3	10.5	3.9	B05-0870	M8	70	1.25	3	14	5
B05-0615	M6	15	1.0	3	10.5	3.9	B05-0875	M8	75	1.25	3	14	5
B05-0616	M6	16	1.0	3	10.5	3.9							

作成日 2008. 1. 15

検図 中田

TRUSCO トラスコ中山株式会社

品名 ナベ頭小ネジ

品番 B05-0000