


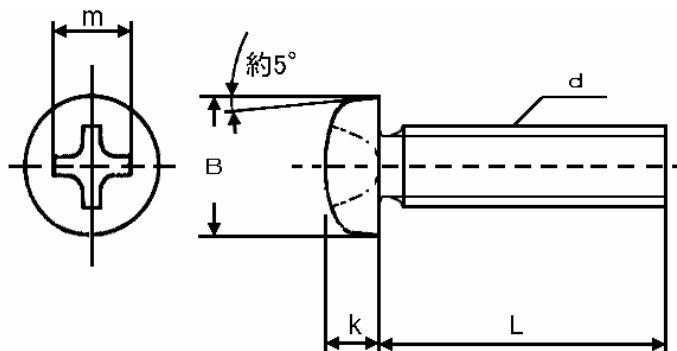

材質：ステンレス（SUS，XM-7）

表面処理：なし

強度：A2-50

品番	ねじの呼び d	長さ L	ピッチ	十字穴番号 m	B	k	品番	ねじの呼び d	長さ L	ピッチ	十字穴番号 m	B	k
B05-0203	M2	3	0.4	1	3.5	1.3	B05-0314	M3	14	0.5	2	5.5	2
B05-0204	M2	4	0.4	1	3.5	1.3	B05-0315	M3	15	0.5	2	5.5	2
B05-0205	M2	5	0.4	1	3.5	1.3	B05-0316	M3	16	0.5	2	5.5	2
B05-0206	M2	6	0.4	1	3.5	1.3	B05-0318	M3	18	0.5	2	5.5	2
B05-0208	M2	8	0.4	1	3.5	1.3	B05-0320	M3	20	0.5	2	5.5	2
B05-0210	M2	10	0.4	1	3.5	1.3	B05-0325	M3	25	0.5	2	5.5	2
B05-0212	M2	12	0.4	1	3.5	1.3	B05-0330	M3	30	0.5	2	5.5	2
B05-0214	M2	14	0.4	1	3.5	1.3	B05-0335	M3	35	0.5	2	5.5	2
B05-0215	M2	15	0.4	1	3.5	1.3	B05-0340	M3	40	0.5	2	5.5	2
B05-0216	M2	16	0.4	1	3.5	1.3	B05-0345	M3	45	0.5	2	5.5	2
B05-0218	M2	18	0.4	1	3.5	1.3	B05-0350	M3	50	0.5	2	5.5	2
B05-0220	M2	20	0.4	1	3.5	1.3	B05-0405	M4	5	0.7	2	7	2.6
B05-0225	M2	25	0.4	1	3.5	1.3	B05-0406	M4	6	0.7	2	7	2.6
B05-2604	M2.6	4	0.45	1	4.5	1.7	B05-0408	M4	8	0.7	2	7	2.6
B05-2605	M2.6	5	0.45	1	4.5	1.7	B05-0410	M4	10	0.7	2	7	2.6
B05-2606	M2.6	6	0.45	1	4.5	1.7	B05-0412	M4	12	0.7	2	7	2.6
B05-2608	M2.6	8	0.45	1	4.5	1.7	B05-0414	M4	14	0.7	2	7	2.6
B05-2610	M2.6	10	0.45	1	4.5	1.7	B05-0415	M4	15	0.7	2	7	2.6
B05-2612	M2.6	12	0.45	1	4.5	1.7	B05-0416	M4	16	0.7	2	7	2.6
B05-2615	M2.6	15	0.45	1	4.5	1.7	B05-0420	M4	20	0.7	2	7	2.6
B05-2620	M2.6	20	0.45	1	4.5	1.7	B05-0425	M4	25	0.7	2	7	2.6
B05-2625	M2.6	25	0.45	1	4.5	1.7	B05-0430	M4	30	0.7	2	7	2.6
B05-0304	M3	4	0.5	2	5.5	2	B05-0435	M4	35	0.7	2	7	2.6
B05-0305	M3	5	0.5	2	5.5	2	B05-0440	M4	40	0.7	2	7	2.6
B05-0306	M3	6	0.5	2	5.5	2	B05-0445	M4	45	0.7	2	7	2.6
B05-0308	M3	8	0.5	2	5.5	2	B05-0450	M4	50	0.7	2	7	2.6
B05-0310	M3	10	0.5	2	5.5	2	B05-0455	M4	55	0.7	2	7	2.6
B05-0312	M3	12	0.5	2	5.5	2	B05-0460	M4	60	0.7	2	7	2.6

作成日 2008. 1. 15

検図 中田

TRUSCO トラスコ中山株式会社

品名 ナベ頭小ネジ

品番 B05-0000