


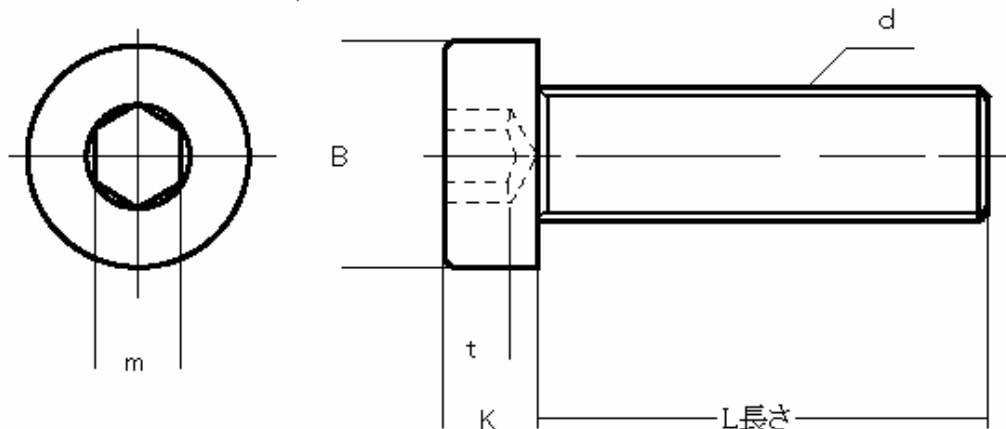

材質：機械構造用炭素鋼（S 4 5 C相当）

表面处理：酸化鉄皮膜

強度：8. 8

品番	ねじの呼び d	長さ L	ピッチ	B	k	m	t	品番	ねじの呼び d	長さ L	ピッチ	B	k	m	t
B081-0306	M3	6	0.5	5.5	2	2	1.5	B081-0516	M5	16	0.8	8.5	3.5	3	2.7
B081-0308	M3	8	0.5	5.5	2	2	1.5	B081-0520	M5	20	0.8	8.5	3.5	3	2.7
B081-0310	M3	10	0.5	5.5	2	2	1.5	B081-0525	M5	25	0.8	8.5	3.5	3	2.7
B081-0312	M3	12	0.5	5.5	2	2	1.5	B081-0610	M6	10	1.0	10	4	4	3
B081-0316	M3	16	0.5	5.5	2	2	1.5	B081-0612	M6	12	1.0	10	4	4	3
B081-0406	M4	6	0.7	7	2.8	2.5	2.3	B081-0616	M6	16	1.0	10	4	4	3
B081-0408	M4	8	0.7	7	2.8	2.5	2.3	B081-0620	M6	20	1.0	10	4	4	3
B081-0410	M4	10	0.7	7	2.8	2.5	2.3	B081-0625	M6	25	1.0	10	4	4	3
B081-0412	M4	12	0.7	7	2.8	2.5	2.3	B081-0810	M8	10	1.25	13	5	5	3.8
B081-0416	M4	16	0.7	7	2.8	2.5	2.3	B081-0812	M8	12	1.25	13	5	5	3.8
B081-0420	M4	20	0.7	7	2.8	2.5	2.3	B081-0816	M8	16	1.25	13	5	5	3.8
B081-0425	M4	25	0.7	7	2.8	2.5	2.3	B081-0820	M8	20	1.25	13	5	5	3.8
B081-0508	M5	8	0.8	8.5	3.5	3	2.7	B081-0825	M8	25	1.25	13	5	5	3.8
B081-0510	M5	10	0.8	8.5	3.5	3	2.7	B081-0830	M8	30	1.25	13	5	5	3.8
B081-0512	M5	12	0.8	8.5	3.5	3	2.7								

作成日
2008. 10. 29

検図
中田

TRUSCO トラスコ中山株式会社

品名
低頭六角穴付ボルト

品番
B 0 8 1 - 〇 〇 〇 〇