


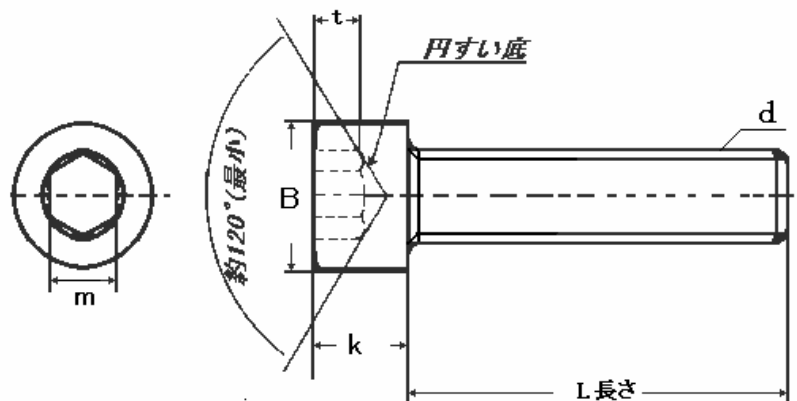

材質：クロムモリブデン鋼（SCM435）

表面処理：酸化鉄皮膜

強度：12.9

品番	寸法 dxL	ネジピッチ P	B	k	m	t	品番	寸法 dxL	ネジピッチ P	B	k	m	t
B30-0203	M2X3	0.4	3.8	2	1.5	1	B30-0408	M4X8	0.7	7.0	4	3.0	2.0
B30-0204	M2X4	0.4	3.8	2	1.5	1	B30-0410	M4X10	0.7	7.0	4	3.0	2.0
B30-0205	M2X5	0.4	3.8	2	1.5	1	B30-0412	M4X12	0.7	7.0	4	3.0	2.0
B30-0206	M2X6	0.4	3.8	2	1.5	1	B30-0414	M4X14	0.7	7.0	4	3.0	2.0
B30-0208	M2X8	0.4	3.8	2	1.5	1	B30-0415	M4X15	0.7	7.0	4	3.0	2.0
B30-0210	M2X10	0.4	3.8	2	1.5	1	B30-0416	M4X16	0.7	7.0	4	3.0	2.0
B30-0212	M2X12	0.4	3.8	2	1.5	1	B30-0418	M4X18	0.7	7.0	4	3.0	2.0
B30-0215	M2X15	0.4	3.8	2	1.5	1	B30-0420	M4X20	0.7	7.0	4	3.0	2.0
B30-0304	M3X4	0.5	5.5	3	2.5	1.3	B30-0422	M4X22	0.7	7.0	4	3.0	2.0
B30-0305	M3X5	0.5	5.5	3	2.5	1.3	B30-0425	M4X25	0.7	7.0	4	3.0	2.0
B30-0306	M3X6	0.5	5.5	3	2.5	1.3	B30-0505	M5X5	0.8	8.5	5	4.0	2.5
B30-0308	M3X8	0.5	5.5	3	2.5	1.3	B30-0506	M5X6	0.8	8.5	5	4.0	2.5
B30-0310	M3X10	0.5	5.5	3	2.5	1.3	B30-0508	M5X8	0.8	8.5	5	4.0	2.5
B30-0312	M3X12	0.5	5.5	3	2.5	1.3	B30-0510	M5X10	0.8	8.5	5	4.0	2.5
B30-0314	M3X14	0.5	5.5	3	2.5	1.3	B30-0512	M5X12	0.8	8.5	5	4.0	2.5
B30-0315	M3X15	0.5	5.5	3	2.5	1.3	B30-0514	M5X14	0.8	8.5	5	4.0	2.5
B30-0316	M3X16	0.5	5.5	3	2.5	1.3	B30-0515	M5X15	0.8	8.5	5	4.0	2.5
B30-0318	M3X18	0.5	5.5	3	2.5	1.3	B30-0516	M5X16	0.8	8.5	5	4.0	2.5
B30-0320	M3X20	0.5	5.5	3	2.5	1.3	B30-0518	M5X18	0.8	8.5	5	4.0	2.5
B30-0322	M3X22	0.5	5.5	3	2.5	1.3	B30-0520	M5X20	0.8	8.5	5	4.0	2.5
B30-0404	M4X4	0.7	7.0	4	3.0	2.0	B30-0522	M5X22	0.8	8.5	5	4.0	2.5
B30-0405	M4X5	0.7	7.0	4	3.0	2.0	B30-0525	M5X25	0.8	8.5	5	4.0	2.5
B30-0406	M4X6	0.7	7.0	4	3.0	2.0							

作成日
2008. 1. 15

検図
中田

TRUSCO トラスコ中山株式会社

品名
六角穴付ボルト

品番
B 3 0 - 〇 〇 〇 〇