


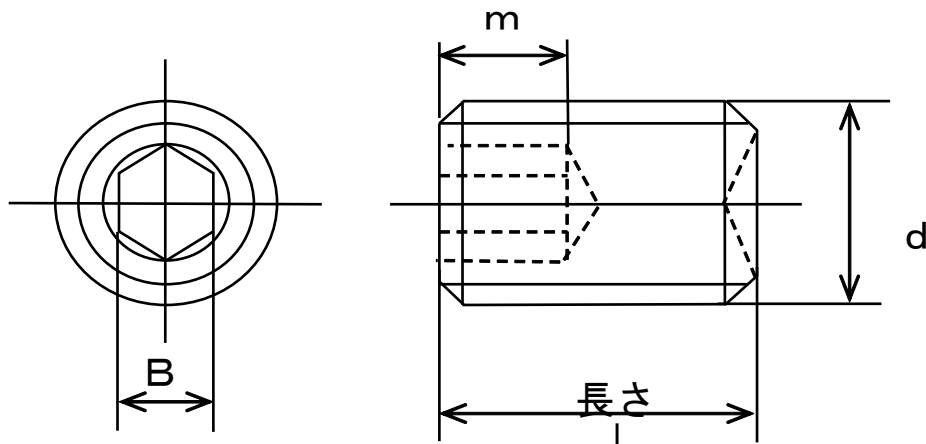

材質：クロムモリブデン鋼（S C M 4 3 5）

表面処理：酸化鉄皮膜

強度：4 5 H

品番	呼び径 d	長さ L	ピッチ	B	m	品番	呼び径 d	長さ L	ピッチ	B	m
B31-0202	M2	2	0.4	0.9	0.8	B31-0315	M3	15	0.5	1.5	1.2
B31-0203	M2	3	0.4	0.9	0.8	B31-0320	M3	20	0.5	1.5	1.2
B31-0204	M2	4	0.4	0.9	0.8	B31-0403	M4	3	0.7	2	1.5
B31-0205	M2	5	0.4	0.9	0.8	B31-0404	M4	4	0.7	2	1.5
B31-0206	M2	6	0.4	0.9	0.8	B31-0405	M4	5	0.7	2	1.5
B31-0208	M2	8	0.4	0.9	0.8	B31-0406	M4	6	0.7	2	1.5
B31-0210	M2	10	0.4	0.9	0.8	B31-0408	M4	8	0.7	2	1.5
B31-2603	M2.6	3	0.45	1.3	1.2	B31-0410	M4	10	0.7	2	1.5
B31-2604	M2.6	4	0.45	1.3	1.2	B31-0412	M4	12	0.7	2	1.5
B31-2605	M2.6	5	0.45	1.3	1.2	B31-0415	M4	15	0.7	2	1.5
B31-2606	M2.6	6	0.45	1.3	1.2	B31-0420	M4	20	0.7	2	1.5
B31-2608	M2.6	8	0.45	1.3	1.2	B31-0504	M5	4	0.8	2.5	2
B31-2610	M2.6	10	0.45	1.3	1.2	B31-0505	M5	5	0.8	2.5	2
B31-0303	M3	3	0.5	1.5	1.2	B31-0506	M5	6	0.8	2.5	2
B31-0304	M3	4	0.5	1.5	1.2	B31-0508	M5	8	0.8	2.5	2
B31-0305	M3	5	0.5	1.5	1.2	B31-0510	M5	10	0.8	2.5	2
B31-0306	M3	6	0.5	1.5	1.2	B31-0512	M5	12	0.8	2.5	2
B31-0308	M3	8	0.5	1.5	1.2	B31-0515	M5	15	0.8	2.5	2
B31-0310	M3	10	0.5	1.5	1.2	B31-0520	M5	20	0.8	2.5	2
B31-0312	M3	12	0.5	1.5	1.2						

作成日
2008. 1. 15

検図
中田

TRUSCO トラスコ中山株式会社

品名
六角穴付止めネジ

品番
B 3 1 - ○ ○ ○ ○