


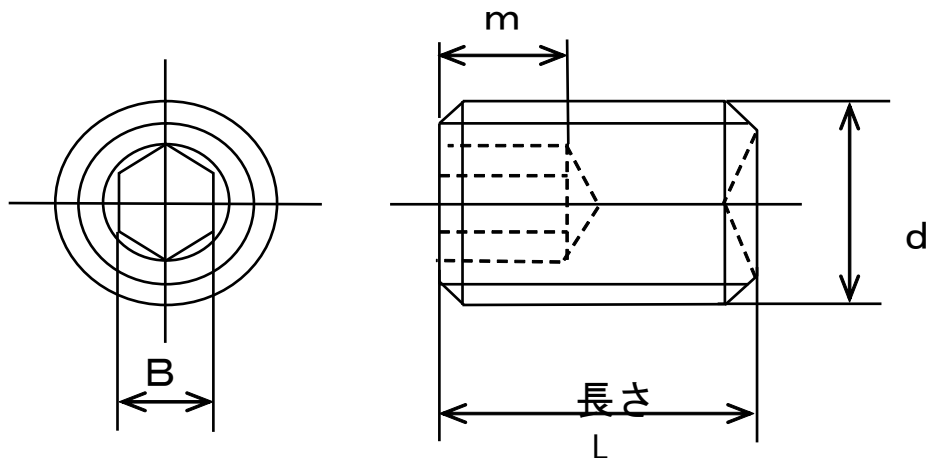

材質：クロムモリブデン鋼（S C M 4 3 5）

表面処理：酸化鉄皮膜

強度：4 5 H

品番	呼び径 d	長さ L	ピッチ	B	m	品番	呼び径 d	長さ L	ピッチ	B	m
B31-0605	M6	5	1.0	3	2	B31-1012	M10	12	1.5	5	4
B31-0606	M6	6	1.0	3	2	B31-1015	M10	15	1.5	5	4
B31-0608	M6	8	1.0	3	2	B31-1020	M10	20	1.5	5	4
B31-0610	M6	10	1.0	3	2	B31-1025	M10	25	1.5	5	4
B31-0612	M6	12	1.0	3	2	B31-1030	M10	30	1.5	5	4
B31-0615	M6	15	1.0	3	2	B31-1035	M10	35	1.5	5	4
B31-0620	M6	20	1.0	3	2	B31-1040	M10	40	1.5	5	4
B31-0625	M6	25	1.0	3	2	B31-1210	M12	10	1.75	6	4.8
B31-0806	M8	6	1.25	4	3	B31-1212	M12	12	1.75	6	4.8
B31-0808	M8	8	1.25	4	3	B31-1215	M12	15	1.75	6	4.8
B31-0810	M8	10	1.25	4	3	B31-1220	M12	20	1.75	6	4.8
B31-0812	M8	12	1.25	4	3	B31-1225	M12	25	1.75	6	4.8
B31-0815	M8	15	1.25	4	3	B31-1230	M12	30	1.75	6	4.8
B31-0820	M8	20	1.25	4	3	B31-1235	M12	35	1.75	6	4.8
B31-0825	M8	25	1.25	4	3	B31-1240	M12	40	1.75	6	4.8
B31-0830	M8	30	1.25	4	3	B31-1231	M12	45	1.75	6	4.8
B31-1008	M10	8	1.5	5	4	B31-1250	M12	50	1.75	6	4.8
B31-1010	M10	10	1.5	5	4						

作成日
2008. 1. 15

検図
中田

TRUSCO トラスコ中山株式会社

品名
六角穴付止めネジ

品番
B 3 1 - 〇〇〇〇