
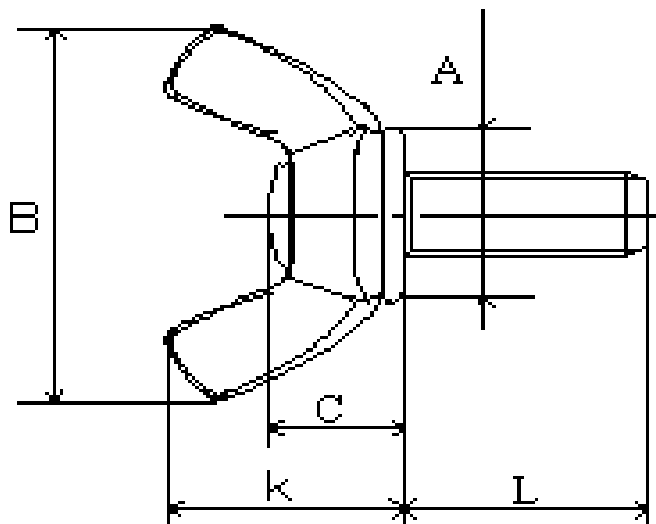


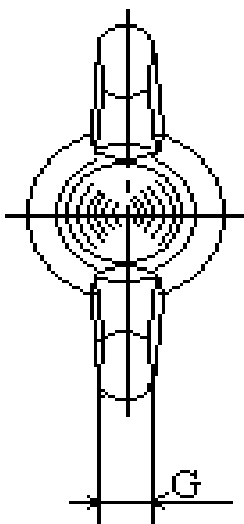

材質：軟鋼線材（SWRM8～10R）

品番	ねじの呼び	長さ L	B	k	C (交差 ±0.7)	G (最大)	A (交差 ±1.0)	品番	ねじの呼び	長さ L	B	k	C (交差 ±1.0)	G (最大)	A (交差 ±1.5)
B39-0410	M4	10	21	11.8	6	3	8.5	B39-0610	M6	10	31	17.0	9	5	12
B39-0412	M4	12	21	11.8	6	3	8.5	B39-0612	M6	12	31	17.0	9	5	12
B39-0415	M4	15	21	11.8	6	3	8.5	B39-0615	M6	15	31	17.0	9	5	12
B39-0420	M4	20	21	11.8	6	3	8.5	B39-0620	M6	20	31	17.0	9	5	12
B39-0425	M4	25	21	11.8	6	3	8.5	B39-0625	M6	25	31	17.0	9	5	12
B39-0430	M4	30	21	11.8	6	3	8.5	B39-0630	M6	30	31	17.0	9	5	12
B39-0510	M5	10	26	13.8	7.5	4	10	B39-0812	M8	12	36	19.1	9.5	5.5	14
B39-0512	M5	12	26	13.8	7.5	4	10	B39-0815	M8	15	36	19.1	9.5	5.5	14
B39-0515	M5	10	26	13.8	7.5	4	10	B39-0820	M8	20	36	19.1	9.5	5.5	14
B39-0520	M5	20	26	13.8	7.5	4	10	B39-0825	M8	25	36	19.1	9.5	5.5	14
B39-0525	M5	25	26	13.8	7.5	4	10	B39-0830	M8	30	36	19.1	9.5	5.5	14
B39-0530	M5	30	26	13.8	7.5	4	10								

作成日
2010. 05. 10

検図
中田

TRUSCO トラスコ中山株式会社

品名
ユニクローム蝶ボルト

品番
B 3 9 - 〇 〇 〇 〇