


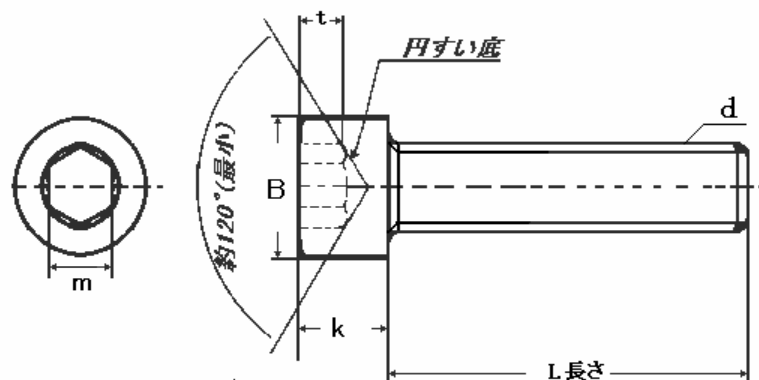

材質：ステンレス（SUS304，XM7）

表面処理：なし

強度：A2-70

品番	寸法 dxL	ネジピッチ P	B	k	m	t	品番	寸法 dxL	ネジピッチ P	B	k	m	t
B44-0305	M3X5	0.5	5.5	3	2.5	1.3	B44-0608	M6X8	1.0	10	6	5	3
B44-0306	M3X6	0.5	5.5	3	2.5	1.3	B44-0610	M6X10	1.0	10	6	5	3
B44-0308	M3X8	0.5	5.5	3	2.5	1.3	B44-0612	M6X12	1.0	10	6	5	3
B44-0310	M3X10	0.5	5.5	3	2.5	1.3	B44-0615	M6X15	1.0	10	6	5	3
B44-0312	M3X12	0.5	5.5	3	2.5	1.3	B44-0616	M6X16	1.0	10	6	5	3
B44-0315	M3X15	0.5	5.5	3	2.5	1.3	B44-0618	M6X18	1.0	10	6	5	3
B44-0316	M3X16	0.5	5.5	3	2.5	1.3	B44-0620	M6X20	1.0	10	6	5	3
B44-0318	M3X18	0.5	5.5	3	2.5	1.3	B44-0625	M6X25	1.0	10	6	5	3
B44-0320	M3X20	0.5	5.5	3	2.5	1.3	B44-0630	M6X30	1.0	10	6	5	3
B44-0406	M4X6	0.7	7.0	4	3	2	B44-0810	M8X10	1.25	13	8	6	4
B44-0408	M4X8	0.7	7.0	4	3	2	B44-0812	M8X12	1.25	13	8	6	4
B44-0410	M4X10	0.7	7.0	4	3	2	B44-0815	M8X15	1.25	13	8	6	4
B44-0412	M4X12	0.7	7.0	4	3	2	B44-0816	M8X16	1.25	13	8	6	4
B44-0415	M4X15	0.7	7.0	4	3	2	B44-0818	M8X18	1.25	13	8	6	4
B44-0416	M4X16	0.7	7.0	4	3	2	B44-0820	M8X20	1.25	13	8	6	4
B44-0418	M4X18	0.7	7.0	4	3	2	B44-0825	M8X25	1.25	13	8	6	4
B44-0420	M4X20	0.7	7.0	4	3	2	B44-0830	M8X30	1.25	13	8	6	4
B44-0425	M4X25	0.7	7.0	4	3	2	B44-0835	M8X35	1.25	13	8	6	4
B44-0506	M5X6	0.8	8.5	5	4	2.5	B44-1015	M10X15	1.5	16	10	8	5
B44-0508	M5X8	0.8	8.5	5	4	2.5	B44-1016	M10X16	1.5	16	10	8	5
B44-0510	M5X10	0.8	8.5	5	4	2.5	B44-1018	M10X18	1.5	16	10	8	5
B44-0512	M5X12	0.8	8.5	5	4	2.5	B44-1020	M10X20	1.5	16	10	8	5
B44-0515	M5X15	0.8	8.5	5	4	2.5	B44-1025	M10X25	1.5	16	10	8	5
B44-0516	M5X16	0.8	8.5	5	4	2.5	B44-1030	M10X30	1.5	16	10	8	5
B44-0518	M5X18	0.8	8.5	5	4	2.5	B44-1035	M10X35	1.5	16	10	8	5
B44-0520	M5X20	0.8	8.5	5	4	2.5	B44-1040	M10X40	1.5	16	10	8	5
B44-0525	M5X25	0.8	8.5	5	4	2.5							

作成日

2008. 1. 15

検図

中田

TRUSCO トラスコ中山株式会社

品名

ステンレス六角穴付ボルト

品番

B 4 4 - 〇 〇 〇 〇