


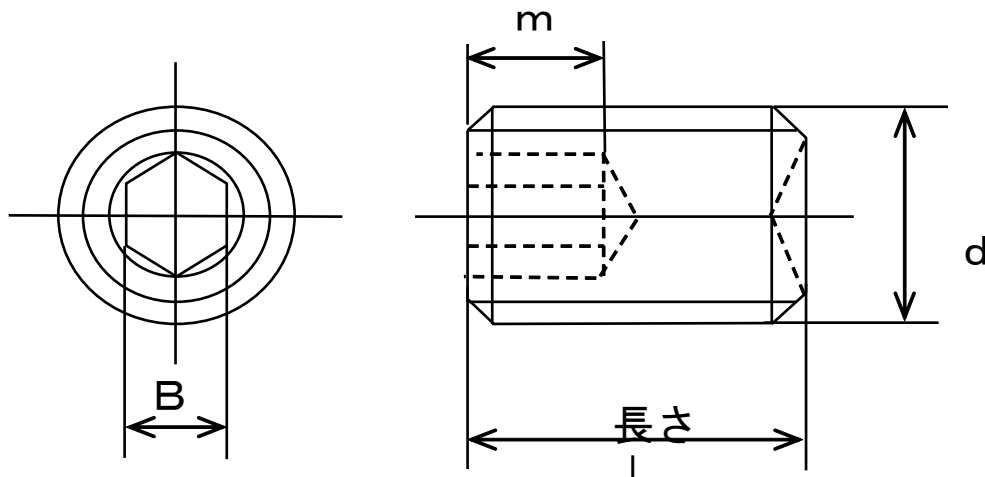

材質：ステンレス（SUS304）

表面処理：なし

強度：A2-70

品番	呼び径 d	長さ L	ピッチ	B	m	品番	呼び径 d	長さ L	ピッチ	B	m
B45-0303	M3	3	0.5	1.5	1.2	B45-0506	M5	6	0.8	2.5	2
B45-0304	M3	4	0.5	1.5	1.2	B45-0508	M5	8	0.8	2.5	2
B45-0305	M3	5	0.5	1.5	1.2	B45-0510	M5	10	0.8	2.5	2
B45-0306	M3	6	0.5	1.5	1.2	B45-0512	M5	12	0.8	2.5	2
B45-0308	M3	8	0.5	1.5	1.2	B45-0515	M5	15	0.8	2.5	2
B45-0310	M3	10	0.5	1.5	1.2	B45-0520	M5	20	0.8	2.5	2
B45-0404	M4	4	0.7	2	1.5	B45-0606	M6	6	1.0	3	2
B45-0405	M4	5	0.7	2	1.5	B45-0608	M6	8	1.0	3	2
B45-0406	M4	6	0.7	2	1.5	B45-0610	M6	10	1.0	3	2
B45-0408	M4	8	0.7	2	1.5	B45-0612	M6	12	1.0	3	2
B45-0410	M4	10	0.7	2	1.5	B45-0615	M6	15	1.0	3	2
B45-0412	M4	12	0.7	2	1.5	B45-0620	M6	20	1.0	3	2
B45-0415	M4	15	0.7	2	1.5	B45-0625	M6	25	1.0	3	2
B45-0505	M5	5	0.8	2.5	2	B45-0630	M6	30	1.0	3	2

作成日
2008. 1. 15

検図
中田

TRUSCO トラスコ中山株式会社

品名
六角穴付止めネジ

品番
B 4 5 - ○ ○ ○ ○