


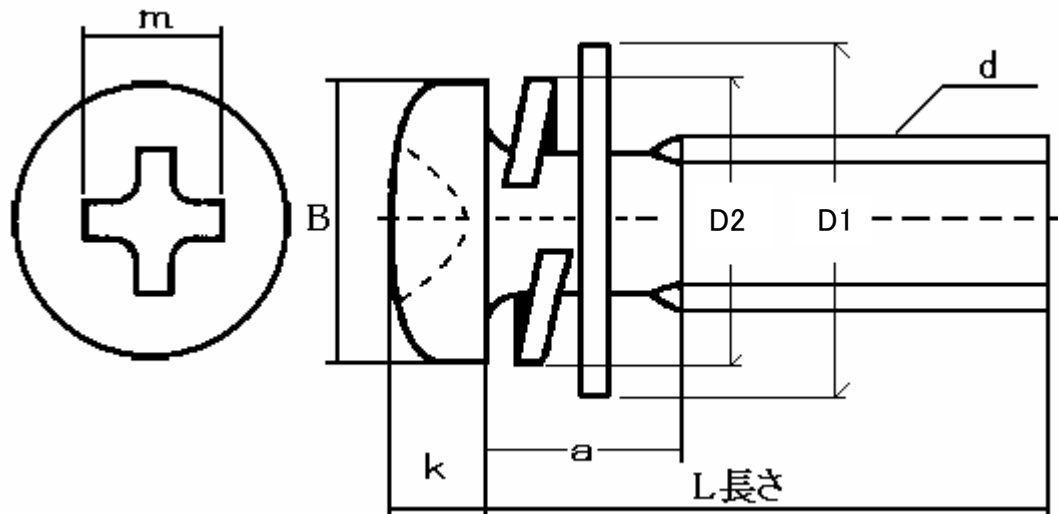

材質：本体 低炭素鋼（SWCH）
 ワッシャー 冷間圧延鋼板（SPCC）
 スプリングワッシャー 硬鋼線材（SWRH）
 表面処理：クロメート
 強度：4. 8

品番	ねじの呼び d	長さ L	ピッチ	a	ボルト本体			平座金		ばね座金		品番	ねじの呼び d	長さ L	ピッチ	a	ボルト本体			平座金		ばね座金	
					十字穴 番号 m	B	k	D1	厚み	D2	幅×厚み						十字穴 番号 m	B	k	D1	厚み	D2	幅×厚み
B50-0306	M3	6	0.5	3	2	5.5	2	8	0.5	5.5	1.1X0.7	B50-0508	M5	8	0.8	5.4	2	9	3.3	12	0.8	8.5	1.7X1.3
B50-0308	M3	8	0.5	3	2	5.5	2	8	0.5	5.5	1.1X0.7	B50-0510	M5	10	0.8	5.4	2	9	3.3	12	0.8	8.5	1.7X1.3
B50-0310	M3	10	0.5	3	2	5.5	2	8	0.5	5.5	1.1X0.7	B50-0512	M5	12	0.8	5.4	2	9	3.3	12	0.8	8.5	1.7X1.3
B50-0312	M3	12	0.5	3	2	5.5	2	8	0.5	5.5	1.1X0.7	B50-0515	M5	15	0.8	5.4	2	9	3.3	12	0.8	8.5	1.7X1.3
B50-0315	M3	15	0.5	3	2	5.5	2	8	0.5	5.5	1.1X0.7	B50-0516	M5	16	0.8	5.4	2	9	3.3	12	0.8	8.5	1.7X1.3
B50-0316	M3	16	0.5	3	2	5.5	2	8	0.5	5.5	1.1X0.7	B50-0520	M5	20	0.8	5.4	2	9	3.3	12	0.8	8.5	1.7X1.3
B50-0320	M3	20	0.5	3	2	5.5	2	8	0.5	5.5	1.1X0.7	B50-0525	M5	25	0.8	5.4	2	9	3.3	12	0.8	8.5	1.7X1.3
B50-0325	M3	25	0.5	3	2	5.5	2	8	0.5	5.5	1.1X0.7	B50-0530	M5	30	0.8	5.4	2	9	3.3	12	0.8	8.5	1.7X1.3
B50-0330	M3	30	0.5	3	2	5.5	2	8	0.5	5.5	1.1X0.7	B50-0535	M5	35	0.8	5.4	2	9	3.3	12	0.8	8.5	1.7X1.3
B50-0406	M4	6	0.7	4.4	2	7	2.6	10	0.8	7	1.4X1.0	B50-0540	M5	40	0.8	5.4	2	9	3.3	12	0.8	8.5	1.7X1.3
B50-0408	M4	8	0.7	4.4	2	7	2.6	10	0.8	7	1.4X1.0	B50-0610	M6	10	1.0	6.9	3	10.5	3.9	13	1	11.5	2.7X1.5
B50-0410	M4	10	0.7	4.4	2	7	2.6	10	0.8	7	1.4X1.0	B50-0612	M6	12	1.0	6.9	3	10.5	3.9	13	1	11.5	2.7X1.5
B50-0412	M4	12	0.7	4.4	2	7	2.6	10	0.8	7	1.4X1.0	B50-0615	M6	15	1.0	6.9	3	10.5	3.9	13	1	11.5	2.7X1.5
B50-0415	M4	15	0.7	4.4	2	7	2.6	10	0.8	7	1.4X1.0	B50-0616	M6	16	1.0	6.9	3	10.5	3.9	13	1	11.5	2.7X1.5
B50-0416	M4	16	0.7	4.4	2	7	2.6	10	0.8	7	1.4X1.0	B50-0620	M6	20	1.0	6.9	3	10.5	3.9	13	1	11.5	2.7X1.5
B50-0420	M4	20	0.7	4.4	2	7	2.6	10	0.8	7	1.4X1.0	B50-0625	M6	25	1.0	6.9	3	10.5	3.9	13	1	11.5	2.7X1.5
B50-0425	M4	25	0.7	4.4	2	7	2.6	10	0.8	7	1.4X1.0	B50-0630	M6	30	1.0	6.9	3	10.5	3.9	13	1	11.5	2.7X1.5
B50-0430	M4	30	0.7	4.4	2	7	2.6	10	0.8	7	1.4X1.0	B50-0635	M6	35	1.0	6.9	3	10.5	3.9	13	1	11.5	2.7X1.5
B50-0435	M4	35	0.7	4.4	2	7	2.6	10	0.8	7	1.4X1.0	B50-0640	M6	40	1.0	6.9	3	10.5	3.9	13	1	11.5	2.7X1.5
B50-0440	M4	40	0.7	4.4	2	7	2.6	10	0.8	7	1.4X1.0												