


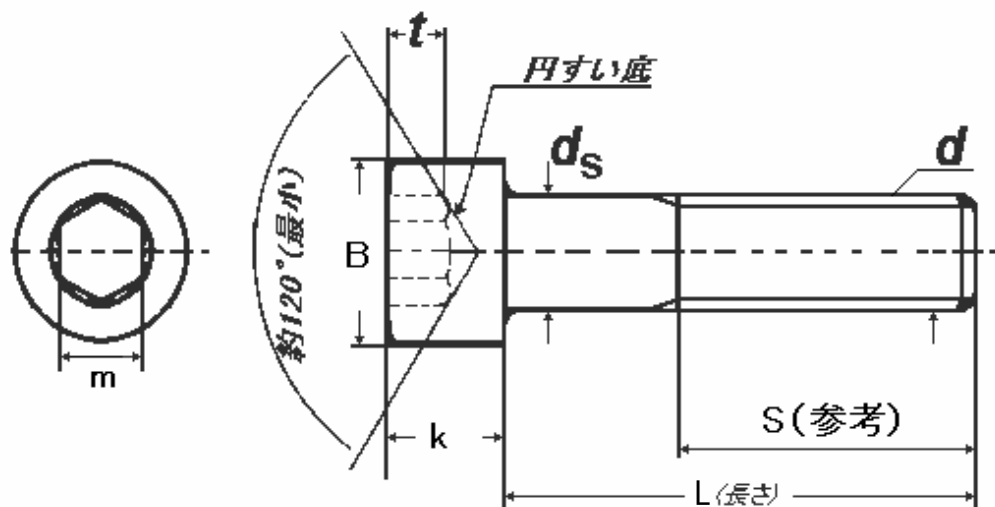

材質：クロムモリブデン鋼（SCM435）

表面処理：ユニクロームメッキ

強度：10.9

品番	寸法 dxL	ネジピッチ P	S	B	ds	k	m	t	品番	寸法 dxL	ネジピッチ P	S	B	ds	k	m	t
B62-0325	M3X25	0.5	18	5.5	3	3	2.5	1.3	B62-0665	M6X65	1.0	24	10	6	6	5	3
B62-0330	M3X30	0.5	18	5.5	3	3	2.5	1.3	B62-0670	M6X70	1.0	24	10	6	6	5	3
B62-0430	M4X30	0.7	20	7	4	4	3	2	B62-0675	M6X75	1.0	24	10	6	6	5	3
B62-0435	M4X35	0.7	20	7	4	4	3	2	B62-0840	M8X40	1.25	28	13	8	8	6	4
B62-0440	M4X40	0.7	20	7	4	4	3	2	B62-0845	M8X45	1.25	28	13	8	8	6	4
B62-0445	M4X45	0.7	20	7	4	4	3	2	B62-0850	M8X50	1.25	28	13	8	8	6	4
B62-0450	M4X50	0.7	20	7	4	4	3	2	B62-0855	M8X55	1.25	28	13	8	8	6	4
B62-0530	M5X30	0.8	22	8.5	5	5	4	2.5	B62-0860	M8X60	1.25	28	13	8	8	6	4
B62-0535	M5X35	0.8	22	8.5	5	5	4	2.5	B62-0865	M8X65	1.25	28	13	8	8	6	4
B62-0540	M5X40	0.8	22	8.5	5	5	4	2.5	B62-0870	M8X70	1.25	28	13	8	8	6	4
B62-0545	M5X45	0.8	22	8.5	5	5	4	2.5	B62-0875	M8X75	1.25	28	13	8	8	6	4
B62-0550	M5X50	0.8	22	8.5	5	5	4	2.5	B62-1045	M10X45	1.5	32	16	10	10	8	5
B62-0635	M6X35	1.0	24	10	6	6	5	3	B62-1050	M10X50	1.5	32	16	10	10	8	5
B62-0640	M6X40	1.0	24	10	6	6	5	3	B62-1055	M10X55	1.5	32	16	10	10	8	5
B62-0645	M6X45	1.0	24	10	6	6	5	3	B62-1060	M10X60	1.5	32	16	10	10	8	5
B62-0650	M6X50	1.0	24	10	6	6	5	3	B62-1065	M10X65	1.5	32	16	10	10	8	5
B62-0655	M6X55	1.0	24	10	6	6	5	3	B62-1070	M10X70	1.5	32	16	10	10	8	5
B62-0660	M6X60	1.0	24	10	6	6	5	3	B62-1075	M10X75	1.5	32	16	10	10	8	5

作成日

2008. 1. 15

検図

中田

TRUSCO トラスコ中山株式会社

品名

ユニクローム六角穴付ボルト

品番

B 6 2 - 〇〇〇〇