


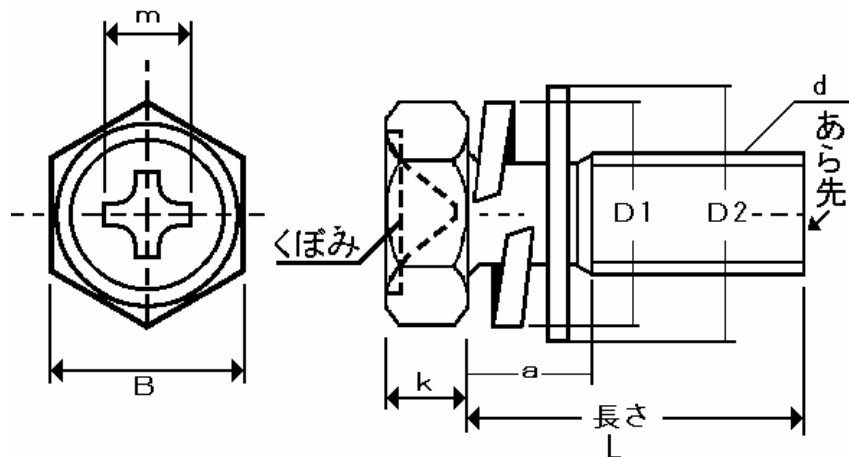

材質：本体 低炭素鋼（SWCH）
 ワッシャー 冷間圧延鋼板（SPCC）
 スプリングワッシャー 硬鋼線材（SWRH）

表面処理：クロメート
 強度：4. 8

品番	ねじの呼び d	長さ L	ピッチ	a	ボルト本体			平座金		ばね座金		品番	ねじの呼び d	長さ L	ピッチ	a	ボルト本体			平座金		ばね座金	
					十字穴番 号 m	B	k	D2	厚み	D1	幅X厚み						十字穴番 号 m	B	k	D2	厚み	D1	幅X厚み
B68-0508	M5	8	0.8	5.4	2	8	3.5	12	0.8	8.5	1.7X13	B68-0630	M6	30	1.0	6.9	3	10	4	13	1	11.5	2.7X1.5
B68-0510	M5	10	0.8	5.4	2	8	3.5	12	0.8	8.5	1.7X13	B68-0635	M6	35	1.0	6.9	3	10	4	13	1	11.5	2.7X1.5
B68-0512	M5	12	0.8	5.4	2	8	3.5	12	0.8	8.5	1.7X13	B68-0640	M6	40	1.0	6.9	3	10	4	13	1	11.5	2.7X1.5
B68-0515	M5	15	0.8	5.4	2	8	3.5	12	0.8	8.5	1.7X13	B68-0645	M6	45	1.0	6.9	3	10	4	13	1	11.5	2.7X1.5
B68-0516	M5	16	0.8	5.4	2	8	3.5	12	0.8	8.5	1.7X13	B68-0650	M6	50	1.0	6.9	3	10	4	13	1	11.5	2.7X1.5
B68-0520	M5	20	0.8	5.4	2	8	3.5	12	0.8	8.5	1.7X13	B68-0812	M8	12	1.25	8.4	3	13	5.5	18	1.6	14.5	3.2X2
B68-0525	M5	25	0.8	5.4	2	8	3.5	12	0.8	8.5	1.7X13	B68-0815	M8	15	1.25	8.4	3	13	5.5	18	1.6	14.5	3.2X2
B68-0530	M5	30	0.8	5.4	2	8	3.5	12	0.8	8.5	1.7X13	B68-0816	M8	16	1.25	8.4	3	13	5.5	18	1.6	14.5	3.2X2
B68-0540	M5	40	0.8	5.4	2	8	3.5	12	0.8	8.5	1.7X13	B68-0818	M8	18	1.25	8.4	3	13	5.5	18	1.6	14.5	3.2X2
B68-0610	M6	10	1.0	6.9	3	10	4	13	1	11.5	2.7X1.5	B68-0820	M8	20	1.25	8.4	3	13	5.5	18	1.6	14.5	3.2X2
B68-0612	M6	12	1.0	6.9	3	10	4	13	1	11.5	2.7X1.5	B68-0825	M8	25	1.25	8.4	3	13	5.5	18	1.6	14.5	3.2X2
B68-0615	M6	15	1.0	6.9	3	10	4	13	1	11.5	2.7X1.5	B68-0830	M8	30	1.25	8.4	3	13	5.5	18	1.6	14.5	3.2X2
B68-0616	M6	16	1.0	6.9	3	10	4	13	1	11.5	2.7X1.5	B68-0835	M8	35	1.25	8.4	3	13	5.5	18	1.6	14.5	3.2X2
B68-0618	M6	18	1.0	6.9	3	10	4	13	1	11.5	2.7X1.5	B68-0840	M8	40	1.25	8.4	3	13	5.5	18	1.6	14.5	3.2X2
B68-0620	M6	20	1.0	6.9	3	10	4	13	1	11.5	2.7X1.5	B68-0845	M8	45	1.25	8.4	3	13	5.5	18	1.6	14.5	3.2X2
B68-0625	M6	25	1.0	6.9	3	10	4	13	1	11.5	2.7X1.5	B68-0850	M8	50	1.25	8.4	3	13	5.5	18	1.6	14.5	3.2X2