


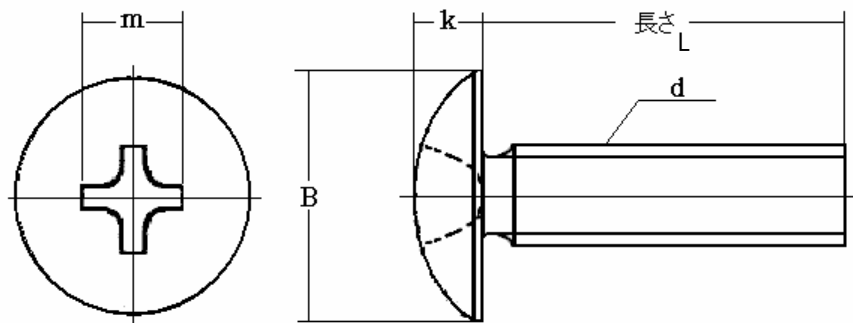

材質：冷間圧造用炭素鋼（SWCH）
 表面処理：三価クロメート（白）
 強度：4. 8

品番	ねじの呼び び d	長さL	ピッチ	十字穴番号 号 m	B	k	品番	ねじの呼び び d	長さL	ピッチ	十字穴番号 号 m	B	k
B704-0304	M3	4	0.5	1	6.9	1.9	B704-0506	M5	6	0.8	2	11.8	3.1
B704-0305	M3	5	0.5	1	6.9	1.9	B704-0508	M5	8	0.8	2	11.8	3.1
B704-0306	M3	6	0.5	1	6.9	1.9	B704-0510	M5	10	0.8	2	11.8	3.1
B704-0308	M3	8	0.5	1	6.9	1.9	B704-0512	M5	12	0.8	2	11.8	3.1
B704-0310	M3	10	0.5	1	6.9	1.9	B704-0515	M5	15	0.8	2	11.8	3.1
B704-0312	M3	12	0.5	1	6.9	1.9	B704-0516	M5	16	0.8	2	11.8	3.1
B704-0315	M3	15	0.5	1	6.9	1.9	B704-0520	M5	20	0.8	2	11.8	3.1
B704-0316	M3	16	0.5	1	6.9	1.9	B704-0525	M5	25	0.8	2	11.8	3.1
B704-0320	M3	20	0.5	1	6.9	1.9	B704-0530	M5	30	0.8	2	11.8	3.1
B704-0325	M3	25	0.5	1	6.9	1.9	B704-0535	M5	35	0.8	2	11.8	3.1
B704-0330	M3	30	0.5	1	6.9	1.9	B704-0540	M5	40	0.8	2	11.8	3.1
B704-0405	M4	5	0.7	2	9.4	2.5	B704-0545	M5	45	0.8	2	11.8	3.1
B704-0406	M4	6	0.7	2	9.4	2.5	B704-0550	M5	50	0.8	2	11.8	3.1
B704-0408	M4	8	0.7	2	9.4	2.5	B704-0610	M6	10	1.0	3	14	3.7
B704-0410	M4	10	0.7	2	9.4	2.5	B704-0612	M6	12	1.0	3	14	3.7
B704-0412	M4	12	0.7	2	9.4	2.5	B704-0615	M6	15	1.0	3	14	3.7
B704-0415	M4	15	0.7	2	9.4	2.5	B704-0616	M6	16	1.0	3	14	3.7
B704-0416	M4	16	0.7	2	9.4	2.5	B704-0620	M6	20	1.0	3	14	3.7
B704-0420	M4	20	0.7	2	9.4	2.5	B704-0625	M6	25	1.0	3	14	3.7
B704-0425	M4	25	0.7	2	9.4	2.5	B704-0630	M6	30	1.0	3	14	3.7
B704-0430	M4	30	0.7	2	9.4	2.5	B704-0635	M6	35	1.0	3	14	3.7
B704-0435	M4	35	0.7	2	9.4	2.5	B704-0640	M6	40	1.0	3	14	3.7
B704-0440	M4	40	0.7	2	9.4	2.5	B704-0645	M6	45	1.0	3	14	3.7
B704-0445	M4	45	0.7	2	9.4	2.5	B704-0650	M6	50	1.0	3	14	3.7
B704-0450	M4	50	0.7	2	9.4	2.5							