


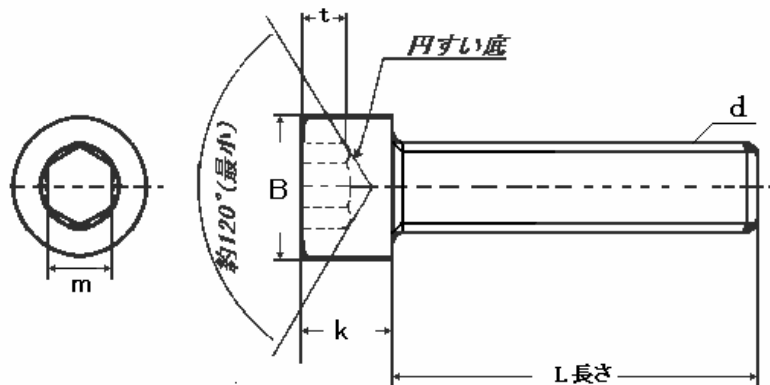

材質：クロムモリブデン鋼（SCM435）

表面処理：三価クロメート（白）

強度：10.9

品番	寸法 dxL	ネジピッチ P	B	k	m	t	品番	寸法 dxL	ネジピッチ P	B	k	m	t
B730-0305	M3X5	0.5	5.5	3	2.5	1.3	B730-0610	M6X10	1.0	10	6	5	3
B730-0306	M3X6	0.5	5.5	3	2.5	1.3	B730-0612	M6X12	1.0	10	6	5	3
B730-0308	M3X8	0.5	5.5	3	2.5	1.3	B730-0615	M6X15	1.0	10	6	5	3
B730-0310	M3X10	0.5	5.5	3	2.5	1.3	B730-0620	M6X20	1.0	10	6	5	3
B730-0312	M3X12	0.5	5.5	3	2.5	1.3	B730-0625	M6X25	1.0	10	6	5	3
B730-0315	M3X15	0.5	5.5	3	2.5	1.3	B730-0630	M6X30	1.0	10	6	5	3
B730-0320	M3X20	0.5	5.5	3	2.5	1.3	B730-0810	M8X10	1.25	13	8	6	4
B730-0408	M4X8	0.7	7.0	4	3	2	B730-0812	M8X12	1.25	13	8	6	4
B730-0410	M4X10	0.7	7.0	4	3	2	B730-0815	M8X15	1.25	13	8	6	4
B730-0412	M4X12	0.7	7.0	4	3	2	B730-0820	M8X20	1.25	13	8	6	4
B730-0415	M4X15	0.7	7.0	4	3	2	B730-0825	M8X25	1.25	13	8	6	4
B730-0420	M4X20	0.7	7.0	4	3	2	B730-0830	M8X30	1.25	13	8	6	4
B730-0425	M4X25	0.7	7.0	4	3	2	B730-0835	M8X35	1.25	13	8	6	4
B730-0508	M5X8	0.8	8.5	5	4	2.5	B730-1015	M10X15	1.5	16	10	8	5
B730-0510	M5X10	0.8	8.5	5	4	2.5	B730-1020	M10X20	1.5	16	10	8	5
B730-0512	M5X12	0.8	8.5	5	4	2.5	B730-1025	M10X25	1.5	16	10	8	5
B730-0515	M5X15	0.8	8.5	5	4	2.5	B730-1030	M10X30	1.5	16	10	8	5
B730-0520	M5X20	0.8	8.5	5	4	2.5	B730-1035	M10X35	1.5	16	10	8	5
B730-0525	M5X25	0.8	8.5	5	4	2.5	B730-1040	M10X40	1.5	16	10	8	5

作成日
2008. 1. 15

検図
中田

TRUSCO トラスコ中山株式会社

品名
三価クロメート六角穴付ボルト

品番
B 7 3 0 - 〇 〇 〇 〇