


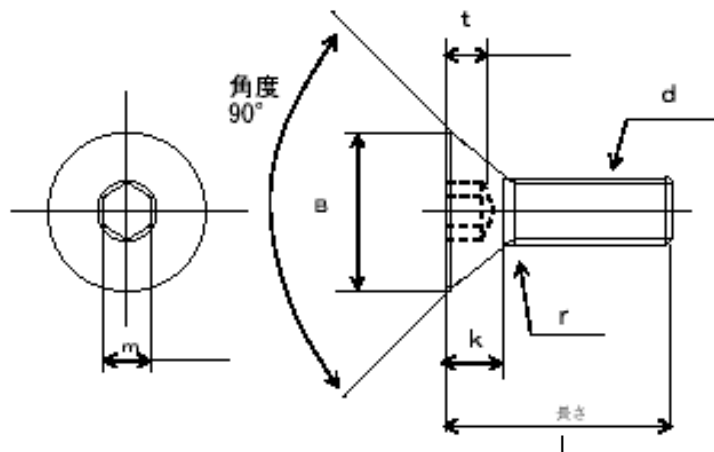

材質：クロムモリブデン鋼（SCM435）

表面処理：酸化鉄皮膜

強度：10.9

品番	ねじの呼び d	長さ L	ピッチ	B	k	m	t	r	品番	ねじの呼び d	長さ L	ピッチ	B	k	m	t	r
B73-0305	M3	5	0.5	6	1.7	2	1.2	0.1	B73-0612	M6	12	1.0	12	3.3	4	2.5	0.3
B73-0306	M3	6	0.5	6	1.7	2	1.2	0.1	B73-0615	M6	15	1	12	3.3	4	2.5	0.3
B73-0308	M3	8	0.5	6	1.7	2	1.2	0.1	B73-0616	M6	16	1	12	3.3	4	2.5	0.3
B73-0310	M3	10	0.5	6	1.7	2	1.2	0.1	B73-0618	M6	18	1	12	3.3	4	2.5	0.3
B73-0312	M3	12	0.5	6	1.7	2	1.2	0.1	B73-0620	M6	20	1	12	3.3	4	2.5	0.3
B73-0315	M3	15	0.5	6	1.7	2	1.2	0.1	B73-0625	M6	25	1	12	3.3	4	2.5	0.3
B73-0320	M3	20	0.5	6	1.7	2	1.2	0.1	B73-0630	M6	30	1	12	3.3	4	2.5	0.3
B73-0406	M4	6	0.7	8	2.3	2.5	1.8	0.2	B73-0812	M8	12	1.25	16	4.4	5	3.5	0.5
B73-0408	M4	8	0.7	8	2.3	2.5	1.8	0.2	B73-0815	M8	15	1.25	16	4.4	5	3.5	0.5
B73-0410	M4	10	0.7	8	2.3	2.5	1.8	0.2	B73-0816	M8	16	1.25	16	4.4	5	3.5	0.5
B73-0412	M4	12	0.7	8	2.3	2.5	1.8	0.2	B73-0820	M8	20	1.25	16	4.4	5	3.5	0.5
B73-0415	M4	15	0.7	8	2.3	2.5	1.8	0.2	B73-0825	M8	25	1.25	16	4.4	5	3.5	0.5
B73-0420	M4	20	0.7	8	2.3	2.5	1.8	0.2	B73-0830	M8	30	1.25	16	4.4	5	3.5	0.5
B73-0508	M5	8	0.8	10	2.8	3	2.3	0.2	B73-0835	M8	35	1.25	16	4.4	5	3.5	0.5
B73-0510	M5	10	0.8	10	2.8	3	2.3	0.2	B73-0840	M8	40	1.25	16	4.4	5	3.5	0.5
B73-0512	M5	12	0.8	10	2.8	3	2.3	0.2	B73-1020	M10	20	1.5	20	5.5	6	4.4	0.5
B73-0515	M5	15	0.8	10	2.8	3	2.3	0.2	B73-1025	M10	25	1.5	20	5.5	6	4.4	0.5
B73-0520	M5	20	0.8	10	2.8	3	2.3	0.2	B73-1030	M10	30	1.5	20	5.5	6	4.4	0.5
B73-0525	M5	25	0.8	10	2.8	3	2.3	0.2	B73-1035	M10	35	1.5	20	5.5	6	4.4	0.5
B73-0530	M5	30	0.8	10	2.8	3	2.3	0.2	B73-1040	M10	40	1.5	20	5.5	6	4.4	0.5
B73-0610	M6	10	1.0	12	3.3	4	2.5	0.3									

作成日
2015.01.18

検図

TRUSCO トラスコ中山株式会社

品名
六角穴付皿ボルト

品番
B73-0000