


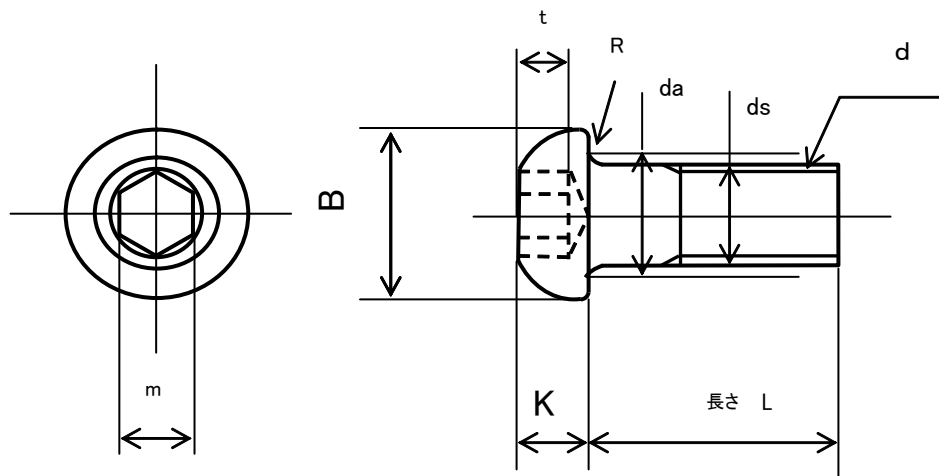

材質：クロムモリブデン鋼（SCM435）

表面処理：酸化鉄皮膜

強度：12.9

品番	ネジの呼び d	長さ L	ピッチ	B	K	ds	m	t	R	da	品番	ネジの呼び d	長さ L	ピッチ	B	K	ds	m	t	R	da
B74-0305	M3	5	0.5	5.5	2	3	2	1.4	0.1	3.6	B74-0506	M5	6	0.8	9.5	3.4	5	3	2.4	0.2	5.7
B74-0306	M3	6	0.5	5.5	2	3	2	1.4	0.1	3.6	B74-0508	M5	8	0.8	9.5	3.4	5	3	2.4	0.2	5.7
B74-0308	M3	8	0.5	5.5	2	3	2	1.4	0.1	3.6	B74-0510	M5	10	0.8	9.5	3.4	5	3	2.4	0.2	5.7
B74-0310	M3	10	0.5	5.5	2	3	2	1.4	0.1	3.6	B74-0512	M5	12	0.8	9.5	3.4	5	3	2.4	0.2	5.7
B74-0312	M3	12	0.5	5.5	2	3	2	1.4	0.1	3.6	B74-0515	M5	15	0.8	9.5	3.4	5	3	2.4	0.2	5.7
B74-0315	M3	15	0.5	5.5	2	3	2	1.4	0.1	3.6	B74-0516	M5	16	0.8	9.5	3.4	5	3	2.4	0.2	5.7
B74-0316	M3	16	0.5	5.5	2	3	2	1.4	0.1	3.6	B74-0518	M5	18	0.8	9.5	3.4	5	3	2.4	0.2	5.7
B74-0320	M3	20	0.5	5.5	2	3	2	1.4	0.1	3.6	B74-0520	M5	20	0.8	9.5	3.4	5	3	2.4	0.2	5.7
B74-0330	M3	30	0.5	5.5	2	3	2	1.4	0.1	3.6	B74-0525	M5	25	0.8	9.5	3.4	5	3	2.4	0.2	5.7
B74-0406	M4	6	0.7	7.5	2.6	4	2.5	1.8	0.2	4.7	B74-0530	M5	30	0.8	9.5	3.4	5	3	2.4	0.2	5.7
B74-0408	M4	8	0.7	7.5	2.6	4	2.5	1.8	0.2	4.7	B74-0540	M5	40	0.8	9.5	3.4	5	3	2.4	0.2	5.7
B74-0410	M4	10	0.7	7.5	2.6	4	2.5	1.8	0.2	4.7	B74-0550	M5	50	0.8	9.5	3.4	5	3	2.4	0.2	5.7
B74-0412	M4	12	0.7	7.5	2.6	4	2.5	1.8	0.2	4.7	B74-0608	M6	8	1.0	10.5	4	6	4	2.8	0.25	6.8
B74-0415	M4	15	0.7	7.5	2.6	4	2.5	1.8	0.2	4.7	B74-0610	M6	10	1.0	10.5	4	6	4	2.8	0.25	6.8
B74-0416	M4	16	0.7	7.5	2.6	4	2.5	1.8	0.2	4.7	B74-0612	M6	12	1.0	10.5	4	6	4	2.8	0.25	6.8
B74-0418	M4	18	0.7	7.5	2.6	4	2.5	1.8	0.2	4.7	B74-0614	M6	14	1.0	10.5	4	6	4	2.8	0.25	6.8
B74-0420	M4	20	0.7	7.5	2.6	4	2.5	1.8	0.2	4.7	B74-0615	M6	15	1.0	10.5	4	6	4	2.8	0.25	6.8
B74-0425	M4	25	0.7	7.5	2.6	4	2.5	1.8	0.2	4.7	B74-0616	M6	16	1.0	10.5	4	6	4	2.8	0.25	6.8
B74-0430	M4	30	0.7	7.5	2.6	4	2.5	1.8	0.2	4.7	B74-0618	M6	18	1.0	10.5	4	6	4	2.8	0.25	6.8
B74-0440	M4	40	0.7	7.5	2.6	4	2.5	1.8	0.2	4.7											

作成日
2008. 1. 15

検図
中田

TRUSCO トラスコ中山株式会社

品名
六角穴付ボタンボルト

品番
B 7 4 - 〇 〇 〇 〇