


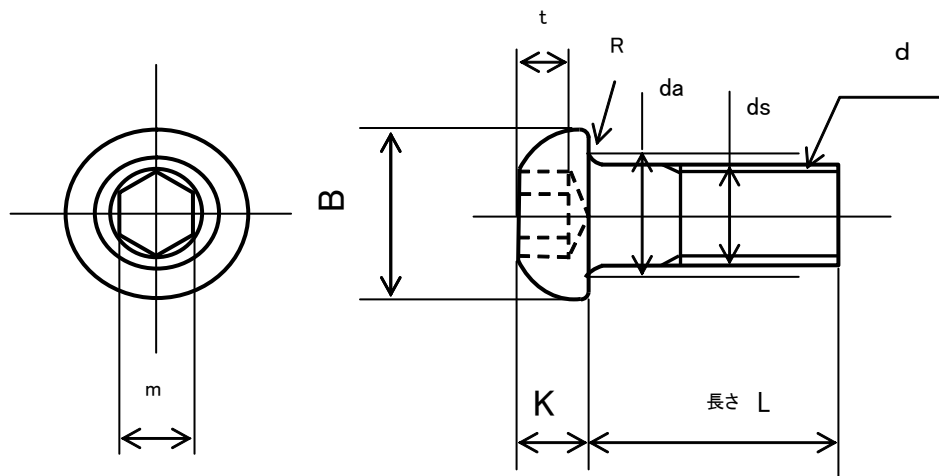

材質：クロモリブデン鋼（S C M 4 3 5）

表面処理：酸化鉄皮膜

強度：1 2 . 9

品番	ネジの呼び d	長さ L	ピッチ	B	K	ds	m	t	R	da	品番	ネジの呼び d	長さ L	ピッチ	B	K	ds	m	t	R	da
B74-0620	M6	20	1.0	10.5	4	6	4	2.8	0.25	6.8	B74-1015	M10	15	1.5	18	6	10	6	4.2	0.4	11.2
B74-0625	M6	25	1.0	10.5	4	6	4	2.8	0.25	6.8	B74-1018	M10	18	1.5	18	6	10	6	4.2	0.4	11.2
B74-0630	M6	30	1.0	10.5	4	6	4	2.8	0.25	6.8	B74-1020	M10	20	1.5	18	6	10	6	4.2	0.4	11.2
B74-0635	M6	35	1.0	10.5	4	6	4	2.8	0.25	6.8	B74-1025	M10	25	1.5	18	6	10	6	4.2	0.4	11.2
B74-0640	M6	40	1.0	10.5	4	6	4	2.8	0.25	6.8	B74-1030	M10	30	1.5	18	6	10	6	4.2	0.4	11.2
B74-0645	M6	45	1.0	10.5	4	6	4	2.8	0.25	6.8	B74-1035	M10	35	1.5	18	6	10	6	4.2	0.4	11.2
B74-0650	M6	50	1.0	10.5	4	6	4	2.8	0.25	6.8	B74-1040	M10	40	1.5	18	6	10	6	4.2	0.4	11.2
B74-0810	M8	10	1.0	10.5	4	6	4	2.8	0.25	6.8	B74-1045	M10	45	1.5	18	6	10	6	4.2	0.4	11.2
B74-0812	M8	12	1.0	10.5	4	6	4	2.8	0.25	6.8	B74-1050	M10	50	1.5	18	6	10	6	4.2	0.4	11.2
B74-0814	M8	14	1.0	10.5	4	6	4	2.8	0.25	6.8	B74-1055	M10	55	1.5	18	6	10	6	4.2	0.4	11.2
B74-0815	M8	15	1.25	14	5	8	5	3.5	0.4	9.2	B74-1060	M10	60	1.5	18	6	10	6	4.2	0.4	11.2
B74-0816	M8	16	1.25	14	5	8	5	3.5	0.4	9.2	B74-1220	M12	20	1.75	21	7	12	8	4.9	0.6	14.2
B74-0820	M8	20	1.25	14	5	8	5	3.5	0.4	9.2	B74-1225	M12	25	1.75	21	7	12	8	4.9	0.6	14.2
B74-0825	M8	25	1.25	14	5	8	5	3.5	0.4	9.2	B74-1230	M12	30	1.75	21	7	12	8	4.9	0.6	14.2
B74-0830	M8	30	1.25	14	5	8	5	3.5	0.4	9.2	B74-1235	M12	35	1.75	21	7	12	8	4.9	0.6	14.2
B74-0835	M8	35	1.25	14	5	8	5	3.5	0.4	9.2	B74-1240	M12	40	1.75	21	7	12	8	4.9	0.6	14.2
B74-0840	M8	40	1.25	14	5	8	5	3.5	0.4	9.2	B74-1250	M12	50	1.75	21	7	12	8	4.9	0.6	14.2
B74-0845	M8	45	1.25	14	5	8	5	3.5	0.4	9.2	B74-1260	M12	60	1.75	21	7	12	8	4.9	0.6	14.2
B74-0850	M8	50	1.25	14	5	8	5	3.5	0.4	9.2											
B74-0860	M8	60	1.25	14	5	8	5	3.5	0.4	9.2											

作成日
2008. 1. 15

検図
中田

TRUSCO トラスコ中山株式会社

品名
六角穴付ボタンボルト

品番
B 7 4 - 〇 〇 〇 〇