


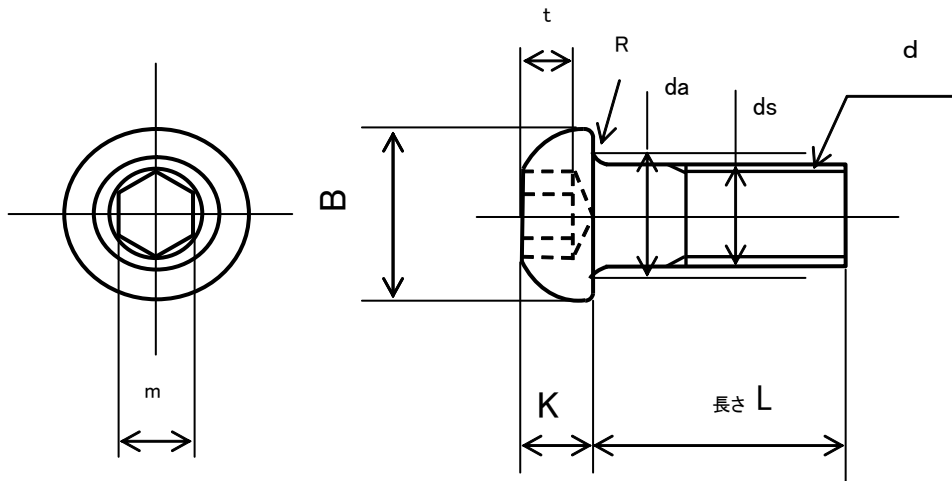

材質：クロムモリブデン鋼（SCM435）

表面処理：三価クロメート（白）

強度：10.9

品番	ネジの呼び d	長さL	ピッチ	B	K	ds	m	t	R	da
B774-0406	M4	6	0.7	7.5	2.6	4	2.5	1.8	0.2	4.7
B774-0408	M4	8	0.7	7.5	2.6	4	2.5	1.8	0.2	4.7
B774-0410	M4	10	0.7	7.5	2.6	4	2.5	1.8	0.2	4.7
B774-0412	M4	12	0.7	7.5	2.6	4	2.5	1.8	0.2	4.7
B774-0415	M4	15	0.7	7.5	2.6	4	2.5	1.8	0.2	4.7
B774-0510	M5	10	0.8	9.5	3.4	5	3	2.4	0.2	5.7
B774-0512	M5	12	0.8	9.5	3.4	5	3	2.4	0.2	5.7
B774-0515	M5	15	0.8	9.5	3.4	5	3	2.4	0.2	5.7
B774-0520	M5	20	0.8	9.5	3.4	5	3	2.4	0.2	5.7
B774-0525	M5	25	0.8	9.5	3.4	5	3	2.4	0.2	5.7
B774-0610	M6	10	1.0	10.5	4	6	4	2.8	0.25	6.8
B774-0612	M6	12	1.0	10.5	4	6	4	2.8	0.25	6.8
B774-0615	M6	15	1.0	10.5	4	6	4	2.8	0.25	6.8
B774-0620	M6	20	1.0	10.5	4	6	4	2.8	0.25	6.8
B774-0625	M6	25	1.0	10.5	4	6	4	2.8	0.25	6.8
B774-0630	M6	30	1.0	10.5	4	6	4	2.8	0.25	6.8
B774-0815	M8	15	1.25	14	5	8	5	3.5	0.4	9.2
B774-0820	M8	20	1.25	14	5	8	5	3.5	0.4	9.2
B774-0825	M8	25	1.25	14	5	8	5	3.5	0.4	9.2
B774-0830	M8	30	1.25	14	5	8	5	3.5	0.4	9.2

作成日
2008. 1. 15

検図
中田

TRUSCO トラスコ中山株式会社

品名
六角穴付ボタンボルト

品番
B 7 7 4 - 〇 〇 〇 〇