


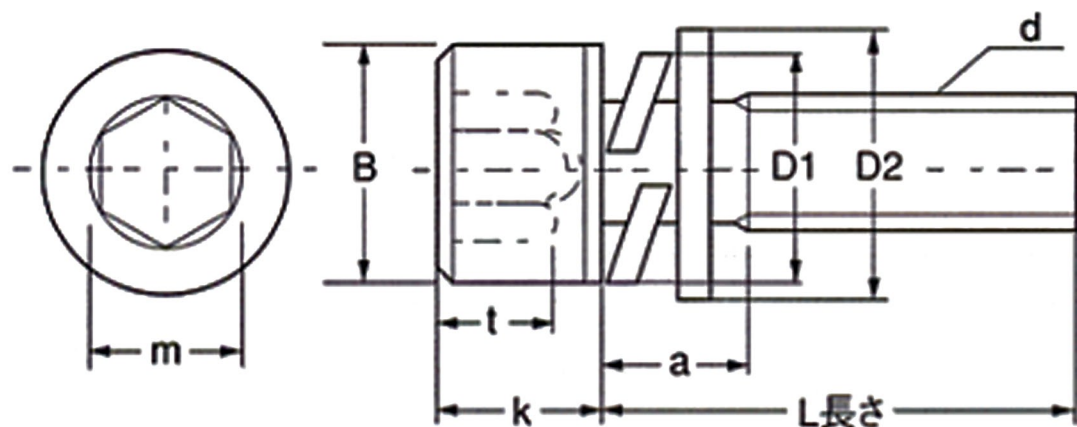

材質：本体 クロムモリブデン鋼（SCM435）
 ワッシャー 冷間圧延鋼板（SPCC）
 スプリングワッシャー 硬鋼線材（SWRH）

表面処理：三価クロメート（白）
 強度：10.9

品番	ねじの呼 d	長さ L	ピッチ	a	B	k	m	t	D1	D2	品番	ねじの呼 d	長さ L	ピッチ	a	B	k	m	t	D1	D2
B777-0306	M3	6	0.5	3	5.5	3	2.5	1.3	5.5	7	B777-0510	M5	10	0.8	5.4	8.5	5	4	2.5	8.5	10
B777-0308	M3	8	0.5	3	5.5	3	2.5	1.3	5.5	7	B777-0512	M5	12	0.8	5.4	8.5	5	4	2.5	8.5	10
B777-0310	M3	10	0.5	3	5.5	3	2.5	1.3	5.5	7	B777-0515	M5	15	0.8	5.4	8.5	5	4	2.5	8.5	10
B777-0312	M3	12	0.5	3	5.5	3	2.5	1.3	5.5	7	B777-0520	M5	20	0.8	5.4	8.5	5	4	2.5	8.5	10
B777-0315	M3	15	0.5	3	5.5	3	2.5	1.3	5.5	7	B777-0525	M5	25	0.8	5.4	8.5	5	4	2.5	8.5	10
B777-0320	M3	20	0.5	3	5.5	3	2.5	1.3	5.5	7	B777-0610	M6	10	1.0	6.9	10	6	5	3	11.5	12.5
B777-0408	M4	8	0.7	4.4	7	4	3	2	7	9	B777-0612	M6	12	1.0	6.9	10	6	5	3	11.5	12.5
B777-0410	M4	10	0.7	4.4	7	4	3	2	7	9	B777-0615	M6	15	1.0	6.9	10	6	5	3	11.5	12.5
B777-0412	M4	12	0.7	4.4	7	4	3	2	7	9	B777-0620	M6	20	1.0	6.9	10	6	5	3	11.5	12.5
B777-0415	M4	15	0.7	4.4	7	4	3	2	7	9	B777-0625	M8	25	1.0	6.9	10	6	5	3	11.5	12.5
B777-0420	M4	20	0.7	4.4	7	4	3	2	7	9	B777-0630	M8	30	1.0	6.9	10	6	5	3	11.5	12.5
B777-0425	M4	25	0.7	4.4	7	4	3	2	7	9											