


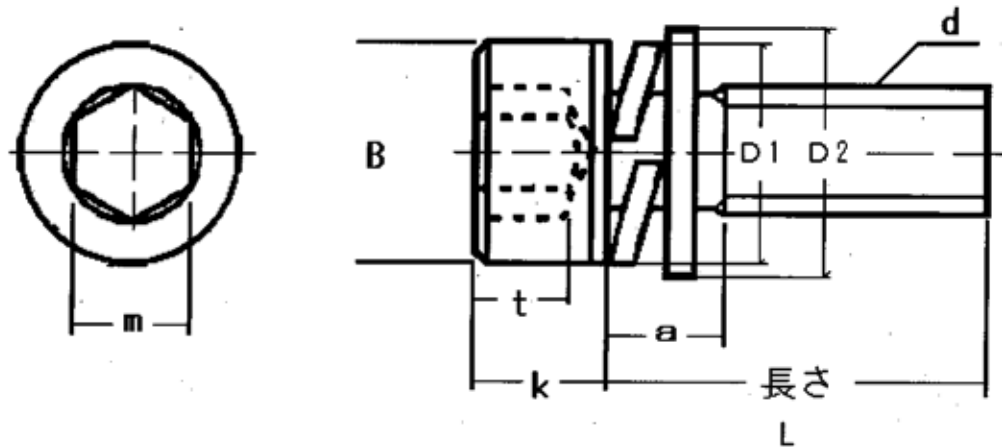

材質：本体 クロムモリブデン鋼 (SCM435)
 ワッシャー 冷間圧延鋼板 (SPCC)
 スプリングワッシャー 硬鋼線材 (SWRH)

表面処理：三価クロメート (黒)
 強度：10.9

品番	ねじの呼び d	長さ L	ピッチ	a	B	k	m	t	D1	D2	品番	ねじの呼び d	長さ L	ピッチ	a	B	k	m	t	D1	D2
B877-0306	M3	6	0.5	3	5.5	3	2.5	1.3	5.5	7	B877-0510	M5	10	0.8	5.4	8.5	5	4	2.5	8.5	10
B877-0308	M3	8	0.5	3	5.5	3	2.5	1.3	5.5	7	B877-0512	M5	12	0.8	5.4	8.5	5	4	2.5	8.5	10
B877-0310	M3	10	0.5	3	5.5	3	2.5	1.3	5.5	7	B877-0515	M5	15	0.8	5.4	8.5	5	4	2.5	8.5	10
B877-0312	M3	12	0.5	3	5.5	3	2.5	1.3	5.5	7	B877-0520	M5	20	0.8	5.4	8.5	5	4	2.5	8.5	10
B877-0315	M3	15	0.5	3	5.5	3	2.5	1.3	5.5	7	B877-0525	M5	25	0.8	5.4	8.5	5	4	2.5	8.5	10
B877-0320	M3	20	0.5	3	5.5	3	2.5	1.3	5.5	7	B877-0610	M6	10	1.0	6.9	10	6	5	3	11.5	12.5
B877-0408	M4	8	0.7	4.4	7	4	3	2	7	9	B877-0612	M6	12	1.0	6.9	10	6	5	3	11.5	12.5
B877-0410	M4	10	0.7	4.4	7	4	3	2	7	9	B877-0615	M6	15	1.0	6.9	10	6	5	3	11.5	12.5
B877-0412	M4	12	0.7	4.4	7	4	3	2	7	9	B877-0620	M6	20	1.0	6.9	10	6	5	3	11.5	12.5
B877-0415	M4	15	0.7	4.4	7	4	3	2	7	9	B877-0625	M6	25	1.0	6.9	10	6	5	3	11.5	12.5
B877-0420	M4	20	0.7	4.4	7	4	3	2	7	9	B877-0630	M6	30	1.0	6.9	10	6	5	3	11.5	12.5
B877-0425	M4	25	0.7	4.4	7	4	3	2	7	9											

作成日
2008. 1. 15

検図
中田

TRUSCO トラスコ中山株式会社

品名
六角穴付組込

品番
B 8 7 7 - 0 0 0 0