


定荷重ばね コンストン 寸法表

(コンストンバネ・副板・ドラム付)

出力: 0.49N(0.05kgf) ~147N(15.0kgf)

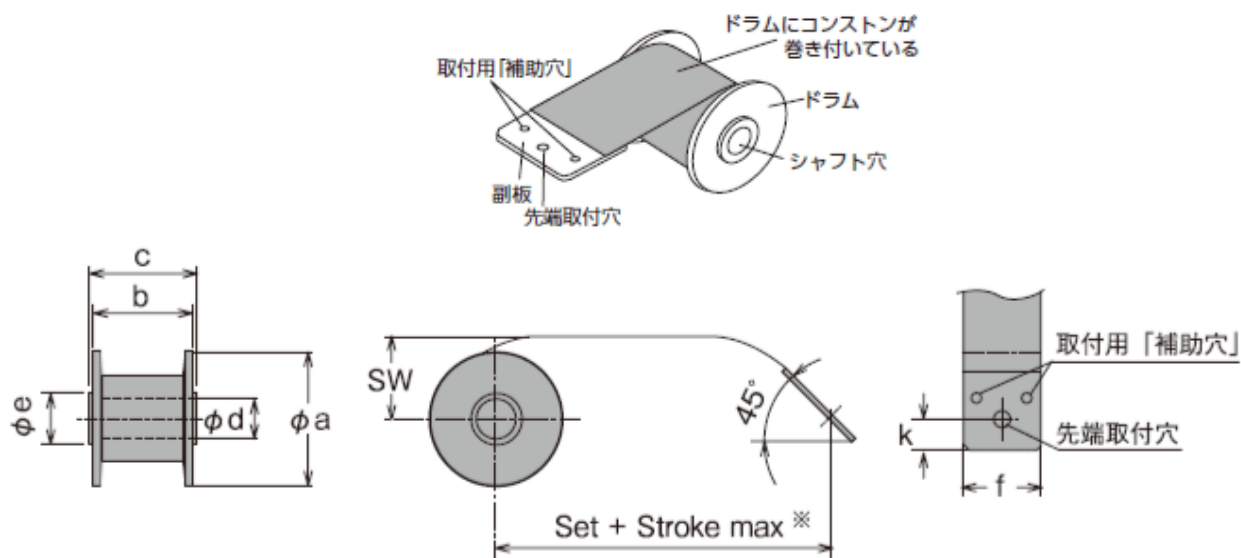

型式	出力kgf	Set+ Stroke max (mm)*	ライフ× 千回	先端取付穴		ドラム(mm)					副板幅f	膨らみ
				直径φ	位置k	a(φ)	b	c	d(φ)	e(φ)		SW(mm)
CS 0.05-1*	0.05	500	160	3.2	5	26	17	18	5.2	8.2	10	-16
CS 0.1-1*	0.1	500	50	3.2	5	26	17	18	5.2	8.2	10	-16
CS 0.2-1*	0.2	500	35	3.2	5	26	17	18	5.2	8.2	10	-16
CS 0.4-1*	0.4	1,000	37	4.5	8	34	25.6	27.6	10.2	13	20	-18
CS 0.6-1*	0.6	1,000	25	4.5	8	34	25.6	27.6	10.2	13	20	-18
CS 0.8-1*	0.8	1,500	25	4.5	8	34	30.6	32.6	10.2	14	25	-18
CS 1.0-1	1	500	6	4.5	5	26	17	18	5.2	8.2	13	-16
CS 1.0-2*		1,000	19	4.5	8	38	26.2	27.6	10.2	14	20	-21
CS 1.2-1	1.2	1,500	34	4.5	8	44	40.6	42.6	10.2	14	35	-26
CS 1.4-1	1.4	1,000	9	4.5	8	34	25.6	27.6	10.2	13	20	-18
CS 1.4-2		1,000	33	6.5	8	44	45.6	47.6	10.2	16	40	-26
CS 1.6-1*	1.6	1,500	17	4.5	8	38	35.6	37.6	10.2	16	30	-21
CS 1.8-1	1.8	1,500	9	4.5	8	34	30.6	32.6	10.2	14	25	-18
CS 2.0-1	2	1,000	6	4.5	8	38	26.2	27.6	10.2	14	20	-21
CS 2.0-2*		1,000	16	4.5	8	44	35.6	37.6	10.2	14	30	-26
CS 2.2-1	2.2	1,000	8	4.5	8	44	25.6	27.6	10.2	14	20	-26

CS 2.2-2	2.2	1,000	19	4.5	8	44	40.6	42.6	10.2	14	35	-26
CS 2.4-1	2.4	1,000	6	4.5	8	38	30.6	32.6	10.2	14	25	-21
CS 2.6-1	2.6	1,000	9	4.5	8	44	30.6	32.6	10.2	14	25	-26
CS 2.9-1	2.9	1,000	6	4.5	8	38	35.6	37.6	10.2	16	30	-21
CS 2.9-2		1,000	20	6.5	8	54	46	49	10.2	16	40	-32
CS 3.2-1*	3.2	1,000	8	4.5	8	44	35.6	37.6	10.2	14	30	-26
CS 3.2-2		1,000	7	4.5	8	38	40.6	42.6	10.2	14	35	-21
CS 3.5-2	3.5	1,000	7	4.5	8	38	43.6	45.6	10.2	16	38	-21
CS 3.5-3		1,000	21	6.5	8	54	56	58	10.2	16	50	-33
CS 3.9-1	3.9	1,000	8	4.5	8	44	40.6	42.6	10.2	14	35	-26
CS 3.9-3		1,000	17	6.5	8	67	47	49	10.2	16	40	-41
CS 4.3-1*	4.3	1,000	8	4.5	8	44	43.6	45.6	10.2	16	38	-26
CS 4.7-2	4.7	1,000	9	6.5	8	44	50.6	52.6	10.2	14	45	-26
CS 5.2-1*	5.2	1,500	6	4.5	8	60	37	40	10.2	16	30	-36
CS 5.2-2		1,000	18	6.5	8	70	56	59	10.2	16	50	-48
CS 5.7-1	5.7	1,000	8	6.5	8	44	55.6	57.6	10.2	14	50	-26
CS 5.7-2		1,500	12	6.5	8	54	56	58	10.2	16	50	-33
CS 5.7-3		1,000	17	6.5	8	67	67	69	10.2	16	60	-41

- ・ 寸法については、予告なしに仕様変更する場合があります。
- ・ CS0.05 ～0.2 とCS1.0-1には、取付用「補助穴」はありません。
- ・ Set+stroke max は副板の先端取付穴からドラム中心までの直線距離です。