

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT<br>PART # | WIRE RANGE<br>AWG<br>[mm <sup>2</sup> ] | COLOR | DIMENSIONS in. [mm] |                  |                  |                  | MAX WIRE<br>INSUL DIA | WIRE STRIP LENGTH<br>in [mm]<br>+ 1/32 [0.8]<br>-0 | TOOLS    |
|-------------------|-----------------------------------------|-------|---------------------|------------------|------------------|------------------|-----------------------|----------------------------------------------------|----------|
|                   |                                         |       | L ± .04<br>[1,1]    | W ± .01<br>[0,3] | C ± .02<br>[0,4] | M ± .02<br>[0,6] |                       |                                                    |          |
| EBNF18-4FIB       | #22-16<br>[0.5-1.5]                     | RED   | .99 [25.2]          | .15 [3.9]        | .28 [7.0]        | .43 [11.0]       | .145 [3.7]            | 9/32"<br>[6.8]                                     | KST2000C |
| EBNF14-4FIB*      | #16-14<br>[1.5-2.5]                     | BLUE  | .99 [25.2]          | .15 [3.9]        | .28 [7.0]        | .43 [11.0]       | .165 [4.2]            |                                                    |          |


\*NOT UL RECOGNIZED

#### NOTES:

- UL RECOGNIZED FOR:
  - STRANDED COPPER WIRE ONLY - INTERNAL WIRING
  - NOT FOR INTERRUPTING CURRENT
  - 185°F (85°C) MAX TEMP RATING
  - 600V MAX VOLTAGE RATING
- MATERIAL:
  - STAMPING - .016" [0.4] THICK BRASS, TIN PLATED
  - HOUSING - NYLON
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT.



E466810

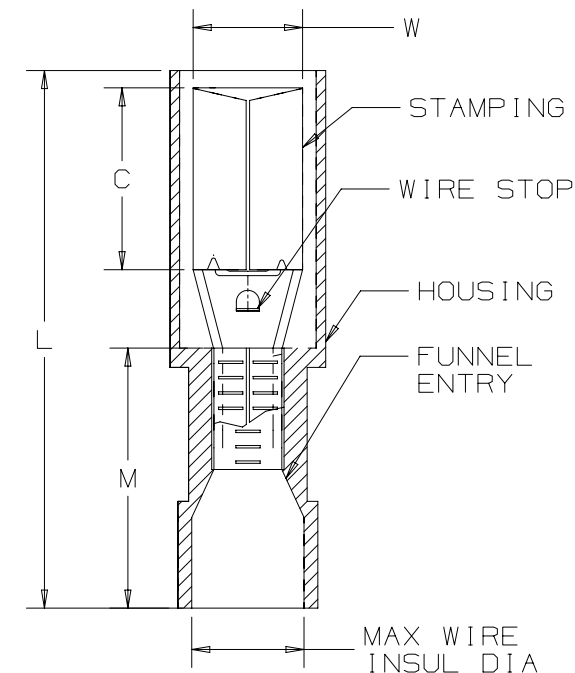

|                                                                                                                                                  |              |             |                                |            |
|--------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------|--------------------------------|------------|
| <b>TITLE</b><br>STRONGHOLD FEMALE BULLET CONNECTORS (156 SERIES)<br>FULLY NYLON INSULATED, #22-14 AWG<br>CUSTOMER DRAWING                        |              |             |                                |            |
| ITEM REVISION NAME<br>00123SSP/00                                                                                                                |              |             |                                |            |
| DATASET FILE NAME<br>00123SSP/00                                                                                                                 |              |             |                                |            |
| UNLESS OTHERWISE SPECIFIED,<br>DIMENSIONAL TOLERANCES ARE: IN [mm]<br>.x ± .1 [2.54]      .xxx ± .005 [.127]<br>.xx ± .01 [.25]      ANGLES ± 5° |              |             | MATERIAL:<br>SEE NOTES         |            |
| THIRD ANGLE<br>PROJECTION                                                                                                                        |              |             | DRAWING NUMBER:<br>00123SSP-DC |            |
| DRAWN BY<br>JHNU                                                                                                                                 | DATE<br>2/18 | CHK<br>NONE | SCALE<br>NONE                  | SHT 1 OF 1 |
| SIZE<br>A                                                                                                                                        |              |             |                                |            |

| 00  | 2/18 | JHNU | TMR | RGB | DRAWING RELEASED | 00123SS |
|-----|------|------|-----|-----|------------------|---------|
| REV | DATE | BY   | CHK | APR | DESCRIPTION      | ECN     |