


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| PANDUIT<br>PART # | WIRE RANGE<br>AWG<br>[mm <sup>2</sup> ] | COLOR | DIMENSIONS in. [mm] |                  |                  |                  | MAX WIRE<br>INSUL DIA | WIRE STRIP LENGTH<br>in [mm]<br>+ 1/32 [0.8]<br>-0 | TOOLS    |
|-------------------|-----------------------------------------|-------|---------------------|------------------|------------------|------------------|-----------------------|----------------------------------------------------|----------|
|                   |                                         |       | L ± .04<br>[1.1]    | W ± .01<br>[0.3] | C ± .02<br>[0.4] | M ± .02<br>[0.6] |                       |                                                    |          |
| EBNF18-4FIM*      | #22-16<br>[0.5-1.5]                     | RED   | 1.06 [26.8]         | .16 [4.0]        | .41 [10.5]       | .39 [10.0]       | .145 [3.7]            | 9/32"<br>[6.8]                                     | KST2000C |
| EBNF14-4FIM       | #16-14<br>[1.5-2.5]                     | BLUE  | 1.06 [27.0]         | .16 [4.0]        | .41 [10.5]       | .39 [10.0]       | .177 [4.5]            |                                                    |          |

\*NOT UL RECOGNIZED

#### NOTES:

- UL RECOGNIZED FOR:
  - STRANDED COPPER WIRE ONLY - INTERNAL WIRING
  - NOT FOR INTERRUPTING CURRENT
  - 185°F (85°C) MAX TEMP RATING
  - 600V MAX VOLTAGE RATING
- MATERIAL:
  - STAMPING - .016" [0.4] THICK BRASS, TIN PLATED
  - HOUSING - NYLON
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT.

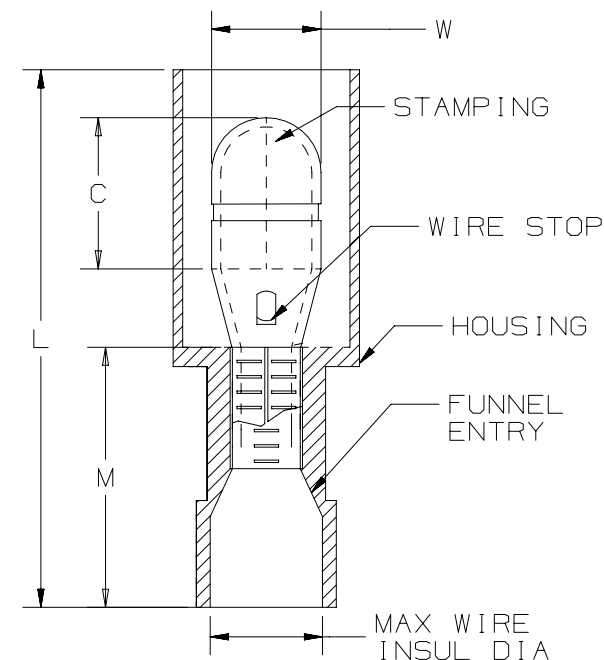

|                                                                                                                                                  |              |                                |                     |
|--------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------------------------|---------------------|
| <b>TITLE</b><br>STRONGHOLD MALE BULLET CONNECTORS (156 SERIES)<br>FULLY NYLON INSULATED, #22-14 AWG<br>CUSTOMER DRAWING                          |              |                                |                     |
| ITEM REVISION NAME<br>00123SSQ/00                                                                                                                |              |                                |                     |
| DATASET FILE NAME<br>00123SSQ/00                                                                                                                 |              |                                |                     |
| UNLESS OTHERWISE SPECIFIED,<br>DIMENSIONAL TOLERANCES ARE: IN [mm]<br>.x ± .1 [2.54]      .xxx ± .005 [.127]<br>.xx ± .01 [.25]      ANGLES ± 5° |              | MATERIAL:<br>SEE NOTES         |                     |
| THIRD ANGLE<br>PROJECTION                                                                                                                        |              | DRAWING NUMBER:<br>00123SSQ-DC |                     |
| DRAWN BY<br>JHNU                                                                                                                                 | DATE<br>2/18 | CHK<br>NONE                    | SCALE<br>SHT 1 OF 1 |
| SIZE<br>A                                                                                                                                        |              |                                |                     |

| 00  | 2/18 | JHNU | TMR | RGB | DRAWING RELEASED | 00123SS |
|-----|------|------|-----|-----|------------------|---------|
| REV | DATE | BY   | CHK | APR | DESCRIPTION      | ECN     |