


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm <sup>2</sup> ]	COLOR	DIMENSIONS in. [mm]				MAX WIRE INSUL DIA	WIRE STRIP LENGTH in [mm] + 1/32 [0.8] -0	TOOLS
			L ± .04 [1.1]	W ± .01 [0.3]	C ± .02 [0.4]	M ± .02 [0.6]			
EBV18-4B	#22-16 [0.5-1.5]	RED	0.85 [21.5]	.15 [3.9]	.28 [7.0]	.39 [10.0]	.145 [3.7]	9/32" [6.8]	KST2000C
EBV14-4B	#16-14 [1.5-2.5]	BLUE	0.85 [21.5]	.15 [3.9]	.28 [7.0]	.39 [10.0]	.165 [4.2]		

# NOTES:

- UL RECOGNIZED FOR:
  - STRANDED COPPER WIRE ONLY - INTERNAL WIRING
  - NOT FOR INTERRUPTING CURRENT
  - 122°F (50°C) MAX TEMP RATING
  - 600V MAX VOLTAGE RATING
- MATERIAL:
  - STAMPING - .016" [0.4] THICK BRASS, TIN PLATED
  - HOUSING - VINYL
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT.

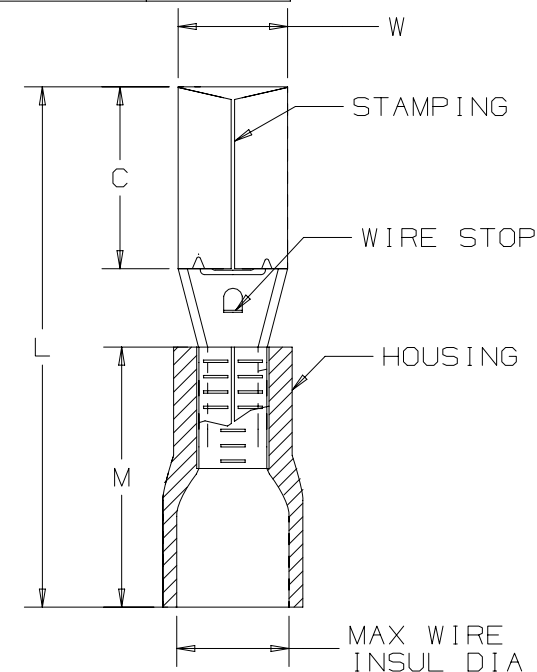

<b>TITLE</b> STRONGHOLD FEMALE BULLET CONNECTORS (156 SERIES) VINYL INSULATED, #22-14 AWG CUSTOMER DRAWING				
ITEM REVISION NAME 00123SSS/00				
DATASET FILE NAME 00123SSS/00				
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54]      .xxx ± .005 [.127] .xx ± .01 [.25]      ANGLES ± 5°			MATERIAL: SEE NOTES	
THIRD ANGLE PROJECTION			DRAWING NUMBER: 00123SSS-DC	
DRAWN BY JHNU	DATE 2/18	CHK NONE	SCALE SHT 1 OF 1	SIZE A

00	2/18	JHNU	TMR	RGB	DRAWING RELEASED	00123SS
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN