

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm ²]	TAB SIZE INCH [mm]	HOUSING COLOR	MAX. WIRE INSULATION DIA.	DIMENSIONS in. [mm]		
					L± [0,8]	W± [0,3]	H± [0,5]
EDNF18-250F1B	#22-18 [0,5-1,0]	.250 X .032 [6,3 X 0,8]	RED	.136 [3,6]	.84 [21,3]	.35 [8,9]	.22 [5,6]
EDNF18-188F1B		.187 X .020 [4,8 X 0,5]			.78 [19,8]	.29 [7,4]	.16 [4,1]
EDNF14-250F1B	#16-14 [1,5-2,5]	.250 X .032 [6,3 X 0,8]	BLUE	.160 [4,1]	.84 [21,3]	.35 [8,9]	.22 [5,6]
EDNF14-188F1B		.187 X .020 [4,8 X 0,5]			.78 [19,8]	.29 [7,4]	.18 [4,6]

NOTES:

1. USED FOR:

- STRANDED COPPER WIRE ONLY
- 221°F [105°C] MAX OPERATING TEMP. (CSA)
- 257°F [125°C] MAX OPERATING TEMP. (UL)
- 600V. MAX. VOLTAGE RATING

2. MATERIAL:

- STAMPING: CDA 260 BRASS, TIN PLATED
- HOUSING: TYPE 6/6 NYLON, COLOR IS TRANSLUCENT

3. INSTALLATION TOOLS:


- UL LISTED AND CSA CERTIFIED:
CT-1525, CT-2500 (CT-2520CH)
- PANDUIT APPROVED: CT-100A, CT-160, CT-260, CT-600A (CT-520CH)

4. WIRE STRIP LENGTH 9/32" ^{+1/32}₋₀ [7.1mm ^{+0.8}₋₀]

5. INITIAL INSERTION/WITHDRAW FORCE: 6-12 Lb [27-32 N]

6. SEE www.panduit.com FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX

7. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

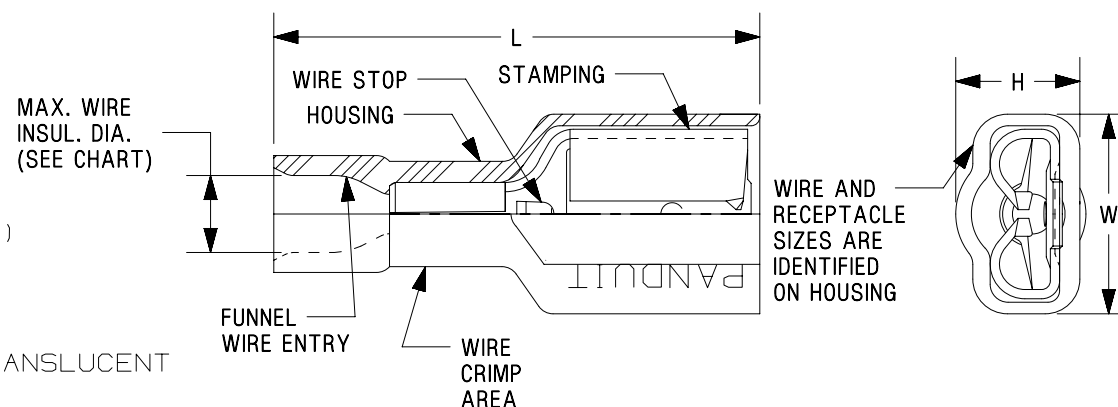

LISTED
587H
E78522



CERTIFIED
LR31212

TITLE STRONGHOLD FEMALE DISCONNECTS (188, 250 SERIES) NYLON FULLY INSULATED, FUNNEL ENTRY #22-14 AWG				
CUSTOMER DRAWING				
ITEM REVISION NAME 00123SHH/00				
DATASET FILE NAME 00123SHH_DC/00		MATERIAL: SEE NOTES		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °		DRAWING NUMBER: SH41196		
		THIRD ANGLE PROJECTION		
DRAWN BY WJB	DATE 01.06.99	CHK -	SCALE N.T.S.	SHEET 1 OF 1