THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	WIRE RANGE AWG [mm²]	TAB SIZE INCH [mm]	HOUSING COLOR (TRANSLUCENT)	MAX WIRE INSULATION DIA.	DIMENSIONS in. [mm]			CRIMP TOOLS
					L± .03 [0,8]	W± .01 [0,3]	H± .01 [0,3]	
EDNF18250FIMB	#22-18 [0,5-1,0]	.250 X .032 [6,3 X 0,8]	RED	.136 [3,45]	.91 [23,1]	.45 [11,4]	.34 [8,6]	CT-520 CT-600-A CT-1525 CT-2500
EDNF14250FIMB	#16-14 [1,5-2,5]	.250 X .032 [6,3 X 0,8]	BLUE	.160 [4,06]	.91 [23,1]	.45 [11,4]	.34 [8,6]	
EDNF10250FIMB	#12-10 [4,0-6,0]	.250 X .032 [6,3 X 0,8]	YELLOW	.220 [5,59]	.96 [24,4]	.45 [11,4]	.36 [9,1]	CT-600-A CT-1550 CT-1551 CT-2500

NOTES:

1. UL LISTED AND CSA CERTIFIED FOR:
   A. STRANDED COPPER WIRE ONLY
   B. 221°F (105°C) MAX TEMP RATING (CSA)
   C. 257°F (125°C) MAX TEMP RATING (UL)
   D. 600V MAX VOLTAGE

2. MATERIAL:
   A. STAMPING: .016" (0.41) THK BRASS, NICKEL PLATED
      EDNF10250FIMB: .032" (0,81) THK COPPER, NICKEL PLATED
   B. HOUSING: 6/6 NYLON

3. WIRE STRIP LENGTH: 9/32" $^{+1/32}_{-0}$ [7,1mm $^{+0.8}_{-0}$]

   FOR EDNF10250FIMB: 3/8" $^{+1/32}_{-0}$ [9,5mm $^{+0.8}_{-0}$]

4. SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX

5. DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

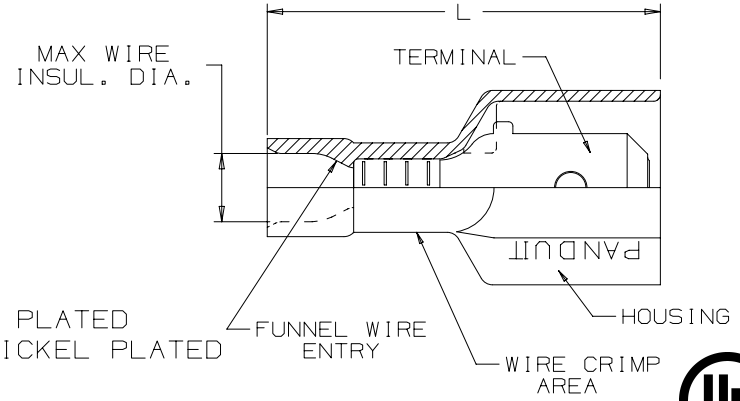



LISTED 20H3 E78522

CERTIFIED LR31212

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	2/18	JHNU	TMR	RGB	RELEASED	00123SH

TITLE

STRONGHOLD MALE DISCONNECT (250 SERIES) NYLON FULLY INSULATED #22-10 AWG

CUSTOMER DRAWING

ITEM REVISION NAME: 00123SHY/00

DATASET FILE NAME: 00123SHY/00

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .1 [2.54] .XXX ± .005 [.127]

.XX ± .01 [.25] ANGLES ± 5 °

THIRD ANGLE PROJECTION

MATERIAL: SEE NOTES

DRAWING NUMBER: SH41402

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
JHNU	2/18	TMR	NTS		A

D10100DA/20