


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT PART #	WIRE RANGE AWG [mm ²]	MAX. WIRE INSUL. DIA.	HOUSING COLOR	DIMENSIONS in. [mm]				TOOLS
				L ± .03 [0,8]	B ± .01 [0,3]	C ± .02 [0,3]	D DIA	
EV18-P47B	#22-18 [0,5-1,0]	.15 [3,8]	RED	.97 [24,6]	.07 [1,8]	.49 [12,4]	.15 [3,8]	CT-100A **CT-260 CT-600A (CT-550CH) CT-1550 CT-1551 CT-2500 (CT-2550CH)
EV14-P47B	#16-14 [1,5-2,5]	.17 [4,3]	BLUE	.97 [24,6]	.07 [1,8]	.49 [12,4]	.17 [4,3]	
EV10-P55*	#12-10 [4,0-6,0]	.25 [6,4]	YELLOW	1.10 [27,9]	.10 [2,5]	.55 [14,0]	.25 [6,35]	

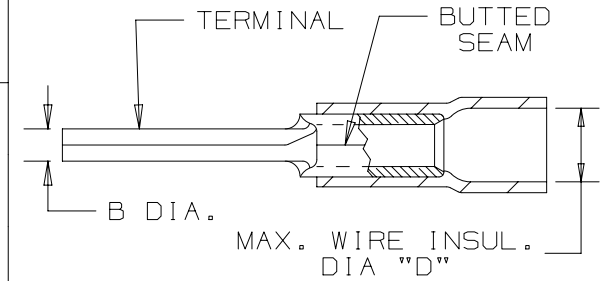


* EV10-P55 NOT UL LISTED, BRAZED SEAM, 300V MAX VOLTAGE
**PANDUIT APPROVED TOOL

NOTES:

- UL LISTED FOR:
 - SOLID OR STRANDED COPPER WIRE ONLY
 - 221°F [105°C] MAX. OPERATING TEMPERATURE
 - 600V. MAX. VOLTAGE RATING
- MATERIAL:
 - STAMPING: .03" [0,8] THK COPPER, TIN PLATED
 - HOUSING: VINYL, COLOR CODED
- WIRE STRIP LENGTH: 5/16" $\begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [7,9mm $\begin{smallmatrix} +0,8 \\ -0 \end{smallmatrix}$]
- SEE www.panduit.com FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

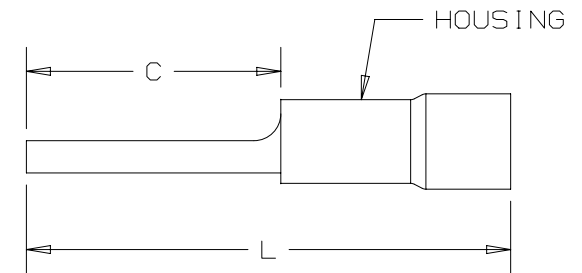

LISTED
587H
E52164

								TITLE				STRONGHOLD PIN TERMINAL VINYL INSULATED #22-10 AWG		CUSTOMER DRAWING		
								ITEM REVISION NAME				00123STB/00				
								DATASET FILE NAME				00123STB/00				
								UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]				MATERIAL:				
								.X ± .XX ±				.XXX ± ANGLES ±				
												THIRD ANGLE PROJECTION				
00	2/18	JHNU	TMR	RGB	RELEASED		00123SH	DRAWN BY				DATE	CHK	SCALE	DRAWING NUMBER:	SIZE
REV	DATE	BY	CHK	APR	DESCRIPTION		ECN	JHNU				2/18	TMR	N.T.S.	SHT 1 OF 1	A