


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE		DIMENSIONS - in. [mm]					TOOLS
	ENGLISH	METRIC	L± [1,6]	W± [0,3]	C± [0,3]	M± [0,9]	H +0,02 [0,4] -0	
EV6-10R	#10	M5	1.65 (41.8)	.47 (12.0)	.52 (13.3)	0.89 (22.5)	.21 (5.3)	KST-HDC38A
EV6-56R	5/16"	M8	1.76 (44.7)	.63 (16.0)	.56 (14.2)	.89 (22.5)	.33 (8.4)	
EV6-38R	3/8"	M10	1.76 (44.7)	.63 (16.0)	.56 (14.2)	.89 (22.5)	.41 (10.5)	
EV6-12R	1/2"	M12	2.10 (53.3)	.87 (22.0)	.78 (19.8)	.89 (22.5)	.51 (13.0)	

NOTES:

- UL LISTED FOR:
 - #6 AWG [14mm²] STRANDED COPPER WIRE
 - 221°F (105°C) MAX TEMP RATING
 - 600V MAX VOLTAGE RATING
- MATERIAL:
 - STAMPING - .059" (1.5) THICK COPPER, TIN PLATED
 - HOUSING - VINYL, BLUE
- WIRE STRIP LENGTH: 9/16" $\begin{smallmatrix} +1/32 \\ -0 \end{smallmatrix}$ [14mm $\begin{smallmatrix} +0.8 \\ -0 \end{smallmatrix}$]
- SEE WWW.PANDUIT.COM FOR PACKAGE QUANTITIES
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT

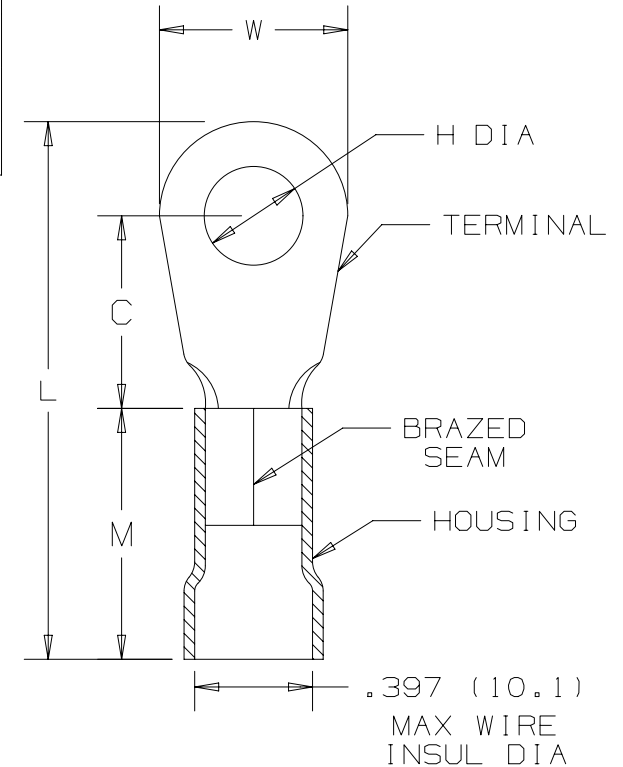

LISTED
20U0
E52164

TITLE		STRONGHOLD RING TERMINAL VINYL INSULATED, BRAZED SEAM #6 AWG [14mm ²]	
CUSTOMER DRAWING			
ITEM REVISION NAME	00123SSA/00	PANDUIT	
DATASET FILE NAME	00123SSA/00		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL: SEE NOTES	
.X ± .XX ± .XXX ± ANGLES ± 		DRAWING NUMBER: 00123SSA-DC	
DRAWN BY	DATE	CHK	SCALE
JHNU	2/18	TMR	NONE
REV		SHT 1 OF 1	
DATE		SIZE	
BY		A	
CHK			
APR			
DESCRIPTION			
ECN			