


2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

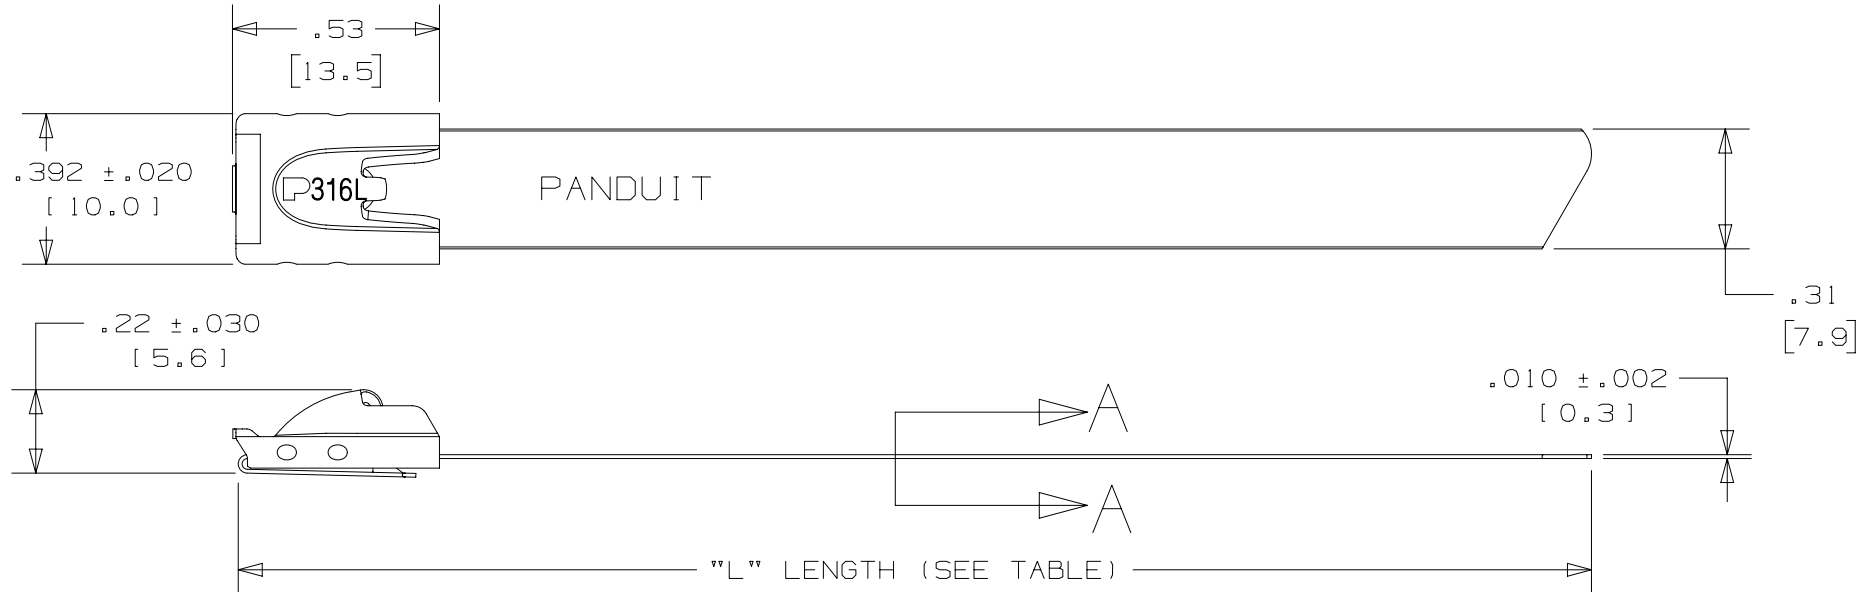


ROUNDED EDGES ALONG
STRAP BODY

NOTES:

1. APPLICATION TOOLS - GS4MT,PPTMT,ST2MT,HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 200 LBS (890 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [] DENOTES DIMENSIONS IN MILLIMETERS.
4. TOLERANCES:
.XXX = ±.010 [.25] .XX = ±.020 [.5]
.X = ±.030 [.8] ANGLES = ±2°
5. MATERIAL: 316L STAINLESS STEEL

PANDUIT PART NO.	PACKAGE QTY	MAX BUNDLE DIAMETER	LENGTH "L" ±.3 [7]
IMLT51H-L6L	50	2" [51]	7.9" [201]
IMLT69H-L6L	50	2.7" [69]	10.2" [259]
IMLT102H-L6L	50	4" [102]	14.3" [362]
IMLT152H-L6L	50	6" [152]	20.5" [521]
IMLT203H-L6L	50	8" [203]	26.8" [679]
IMLT254H-L6L	50	10" [254]	33.0" [838]
IMLT304H-Q6L	25	12" [304]	39.3" [998]
IMLT355H-Q6L	25	14" [355]	45.5" [1156]

TITLE					
IMLT HEAVY SINGLE LOOP ASSEMBLY 316L STAINLESS STEEL					
CUSTOMER DRAWING					
ITEM REVISION NAME			PANDUIT		
15L355BE/02					
DATASET FILE NAME			MATERIAL:		
15L355BE_DC/02					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]			316L STAINLESS STEEL		
.X ± .XX ±					
.XXX ± ANGLES ±			DRAWING NUMBER:		
 THIRD ANGLE PROJECTION					
DRAWN BY	DATE	CHK	SCALE	SIZE	
JSUN	1/16	JSUN	2:1	SHT 1 OF 1	A

2

1