


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.





PANDUIT PART NO.	MAX BUNDLE DIAMETER	PACKAGE QTY	LENGTH ('L") +/- .3" [7]
IMLTFC38H-C6L	1.5" [38]	100	6.2" [158]
IMLTFC51H-L6L	2" [51]	50	7.9" [201]
IMLTFC64H-C6L	2.5" [64]	100	9.4" [233]
IMLTFC69H-L6L	2.7" [69]	50	10.2" [259]
IMLTFC86H-C6L	3.4" [86]	100	12.2" [310]
IMLTFC102H-L6L	4" [102]	50	14.3" [362]
IMLTFC137H-C6L	5.4" [137]	100	18.2" [462]
IMLTFC152H-L6L	6" [152]	50	20.5" [521]
IMLTFC203H-L6L	8" [203]	50	26.8" [679]

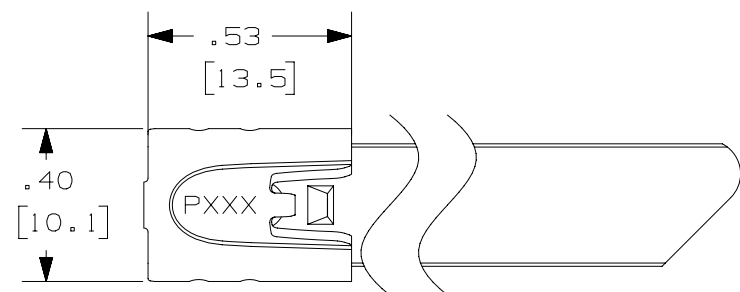

NOTES :

1. APPLICATION TOOLS - GS4MT,PPTMT,ST2MT,HTMT,PBTMT
2. MINIMUM LOOP TENSILE STRENGTH - 200 LBS. (890 NEWTONS)
WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS, AND
ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:
 .XXX = $\pm .010$ [.25] .XX = $\pm .02$ [.5]
 .X = $\pm .03$ [.8] ANGLES = $\pm 2^\circ$
5. MATERIAL: 316L STAINLESS STEEL
6. COATING - EPOXY POLYESTER

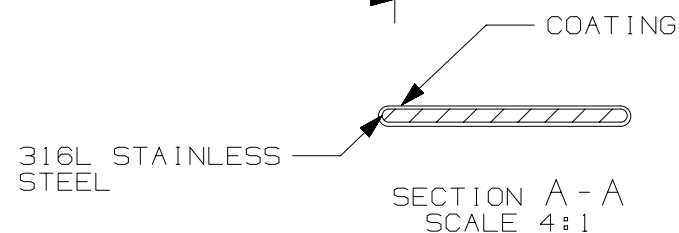

TITLE				
IMLT HEAVY FULLY COATED SINGLE LOOP ASSEMBLY 316L STAINLESS STEEL				
CONTROL DRAWING				
ITEM REVISION NAME				
15L355BG/00				
DATASET FILE NAME				
15L355BG_DC/00				
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °		MATERIAL: 316L STAINLESS STEEL		
		DRAWING NUMBER: 15L355BG_DC		
DRAWN BY	DATE	CHK	SCALE	SIZE
JSUN	3-7-16	JSUN	2:1	A

D10100DA/16