


MODEL MNB-N

無励磁作動ブレーキ

1.2形、2.5形、5形、10形、20形、40形、80形

トルク：12～800N・m

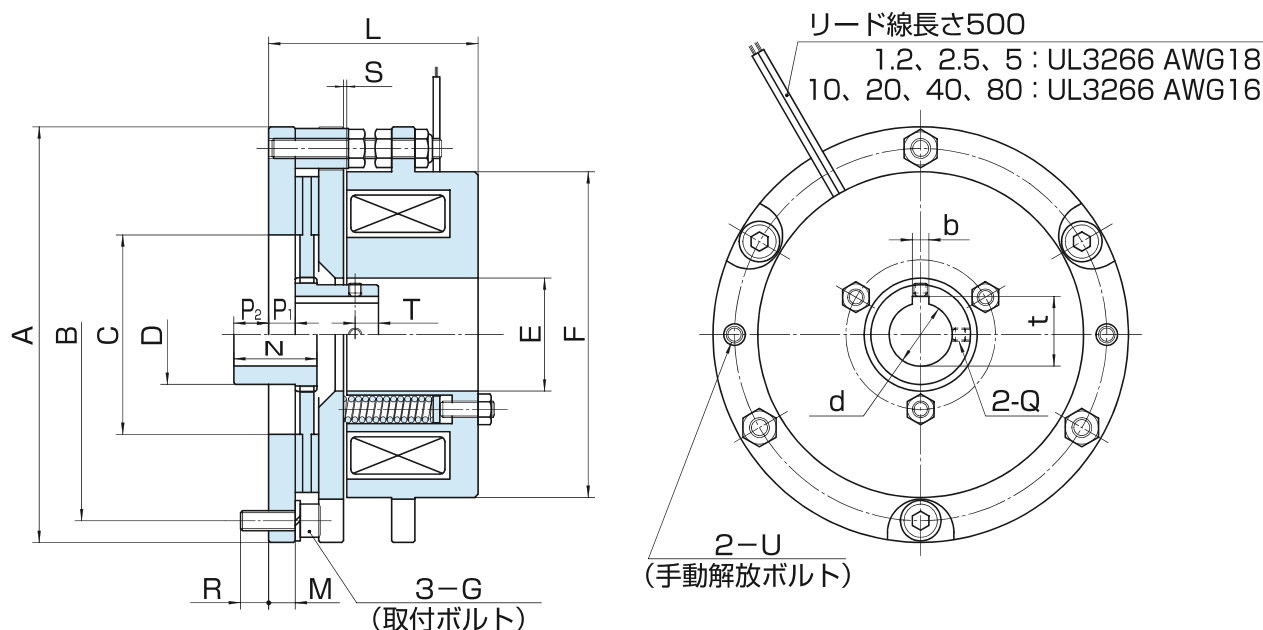

形 番 MNB-N	1.2G	1.2K	2.5G	2.5K	5G	5K	10G	10K	20J	20K	40J	40K	80J	80K
定格電圧 DC(V)	24	90	24	90	24	90	24	90	72	90	72	90	72	90
静摩擦トルク (N・m)	12		25		50		100		200		400		800	
慣性 $J \times 10^{-4} [kg \cdot m^2]$	3		6		14.5		25		60		170		503	
穴 径 d_{H7}	19		24		28		32		42		55		65	
キーみぞ $b_{E9} \times t_{0.2}^{+0.2}_0$	5×21		7×27		7×31		10×35.5		12×45.5		16×60		18×71	
径 方 向	A _{H9}	125	145		165		190		230		275		340	
	B	112	130		150		170		210		250		305	
	C _{H9}	60	75		85		95		125		150		180	
	D	30	38		45		52		65		80		95	
	E	34	44		54		60		70		90		105	
	F	98	116		134		152		186		220		270	
	G	M6	M6		M6		M8		M8		M12		M16	
軸 方 向	L	63	72		78		88		98		*125		*145	
	L ₁	—	—		—		—		—		—		—	
	M	8	9		10		11		12		15		18	
	N	25	30		35		40		50		60		70	
	P ₁	8	9		10		11		12		15		18	
	P ₂	10.5	13		16		18		27		31		33	
	Q	M4	M5		M6		M6		M8		M8		M8	
	R	8.5	9.5		8.5		12		11		17		23	
	S (通り止め)	0.1～0.35	0.1～0.35		0.1～0.35		0.2～0.45		0.2～0.45		0.2～0.45		0.3～0.55	
	T	7	10		10		15		15		28		30	
	U	M5×28	M6×30		M6×35		M8×40		M10×45		M12×85		M12×95	
質 量 (kg)	3.3		5.2		7.4		11.0		18.5		34.8		62.0	

* 40、80形については、空隙調整用ボルトがL寸法よりそれぞれ18mm、22mm長くなります。