


材質: S45C 硬度: 25~30HRC 表面処理: 黒染 ねじ穴止まり

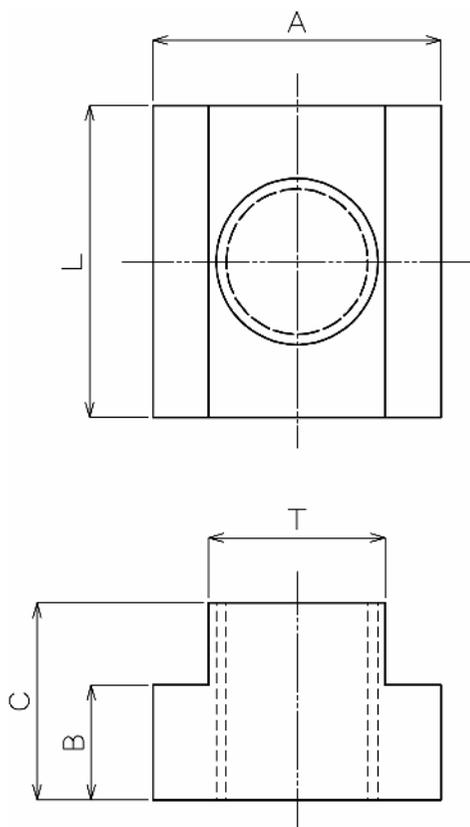

品番	適合ボルト	適合T溝巾 (mm)	A (mm)	B (mm)	C (mm)	T (mm)	L (mm)
T1008-TN	M8 P1.25	10	15.8	4.7	12.7	9.5	22
T1210-TN	M10 P1.5	12	17.5	5.5	12.7	11.7	22
T1410-TN	M10 P1.5	14	22.2	8.7	15.8	13.8	28
T1412-TN	M12 P1.75	14	22.2	8.7	15.8	13.8	28
T1612-TN	M12 P1.75	16	25.0	8.7	16.0	15.8	28
T1614-TN	M14 P2.0	16	25.0	8.7	16.0	15.8	28
T1812-TN	M12 P1.75	18	28.5	11.1	19.0	17.5	30
T1814-TN	M14 P2.0	18	28.5	11.1	19.0	17.5	30
T1816-TN	M16 P2.0	18	28.5	11.1	19.0	17.5	30
T2016-TN	M16 P2.0	20	31.7	11.9	19.0	19.7	30
T2018-TN	M18 P2.5	20	31.7	14.0	25.0	19.7	38
T2216-TN	M16 P2.0	22	36.0	13.8	25.4	21.7	38
T2218-TN	M18 P2.5	22	36.0	13.8	25.4	21.7	38
T2220-TN	M20 P2.5	22	36.0	13.8	25.4	21.7	38
T2418-TN	M18 P2.5	24	38.0	14.0	25.0	23.5	38
T2420-TN	M20 P2.5	24	38.0	14.0	25.0	23.5	38
T2620-TN	M20 P2.5	26	41.3	15.8	25.0	24.7	44
T2622-TN	M22 P2.5	26	41.3	15.8	25.0	24.7	44
T2816-TN	M16 P2.0	28	44.0	17.9	28.5	26.9	50
T2822-TN	M22 P2.5	28	44.0	17.9	28.5	26.9	50
T2824-TN	M24 P3.0	28	44.0	17.9	28.5	26.9	50

作成日  
2018.07. 30

検図  
東京商品部

TRUSCO トラスコ中山株式会社

品名  
Tスロットナット

品番  
T0000-TN