


	製品寸法										特 性 値					
	φD	φD1	L	h	d	t	C	P	d1	R	圧縮ばね：Kc (N/mm)	最大荷重 (N)	最大たわみ (mm)	受圧面積 (cm ²)	剛性比 Ks/Kc	重 量 (g)
TA703	25	20	16	12.8	M6	1.6	19	42	7	7	135	345	2.5	3.1	0.17	33
TA704	29	24	20	15.4	M8	2.3	23	48	9	8	175	490	2.8	4.5	0.17	60
TA705	29	24	30	25.4	M8	2.3	23	48	9	8	83.5	390	4.7	4.5	0.18	65
TA706	38	32	20	15.4	M8	2.3	28	60	9	10	345	930	3.2	8.0	0.17	90
TA707	38	32	25	20.4	M8	2.3	28	60	9	10	225	835	3.7	8.0	0.19	95
TA708	38	32	30	25.4	M8	2.3	28	60	9	10	150	735	4.8	8.0	0.18	100
TA709	46	40	25	18.6	M10	3.2	27	73	11	12	420	1550	3.7	12.6	0.16	170
TA710	46	40	30	23.6	M10	3.2	27	73	11	12	285	1350	4.8	12.6	0.15	180
TA711	46	40	40	33.6	M10	3.2	27	73	11	12	165	1050	6.5	12.6	0.17	195
TA712	69	63	40	33.6	M12	3.2	37	100	14	14	520	3350	6.4	31.2	0.15	390
TA713	69	63	55	48.6	M12	3.2	37	100	14	14	295	2750	9.3	31.2	0.16	450
TA714	90	80	60	50.0	M16	5.0	45	134	18	20	520	5200	10.0	50.3	0.17	990
TA715	90	80	80	70.0	M16	5.0	45	134	18	20	320	4450	14.0	50.3	0.15	1120

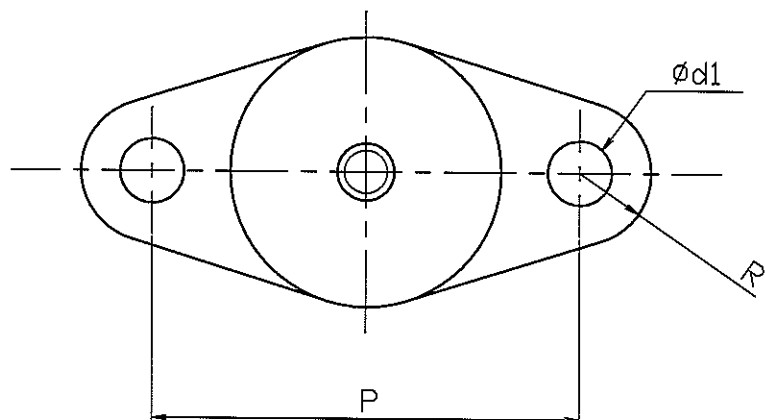