


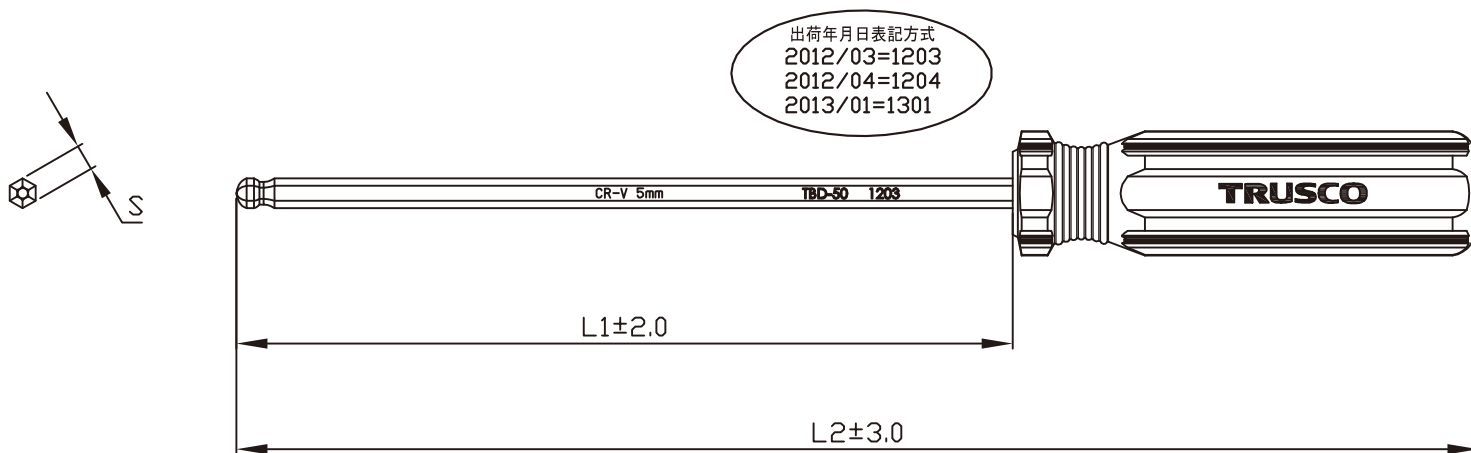

CR-V 10mm
刻印

TBD-100 1206
レーザー表記

品番	対辺寸法	B		L1	L2	硬度 HRC (min)	トルク N-M (min)	表記内容		表記内容 (1 : 1)
		max	min	±2.0	±2.0					
TBD-15	1.5 mm	1.50	1.48	60	122	52°	0.5	1.5mm	1206	CR-V 3mm CR-V 4mm CR-V 5mm CR-V 6mm CR-V 8mm CR-V 10mm TBD-30 1206 TBD-40 1206 TBD-50 1206 TBD-60 1206 TBD-80 1206 TBD-100 1206
TBD-20	2.0 mm	2.00	1.96	80	142		1.1	2.0mm	1206	
TBD-25	2.5 mm	2.50	2.46	90	152		2.5	TBD-25 2.5mm	1206	
TBD-30	3.0 mm	3.00	2.96	110	200		4.2	CR-V 3mm TBD-30	1206	
TBD-40	4.0 mm	4.00	3.95	130	220		9.7	CR-V 4mm TBD-40	1206	
TBD-50	5.0 mm	5.00	4.95	140	230		19.2	CR-V 5mm TBD-50	1206	
TBD-60	6.0 mm	6.00	5.95	150	240	50°	31.3	CR-V 6mm TBD-60	1206	
TBD-80	8.0 mm	8.00	7.94	180	288		69.3	CR-V 8mm TBD-80	1206	
TBD-100	10.0 mm	10.00	9.94	190	300		138.6	CR-V 10mm TBD-100	1206	

単位 : mm