
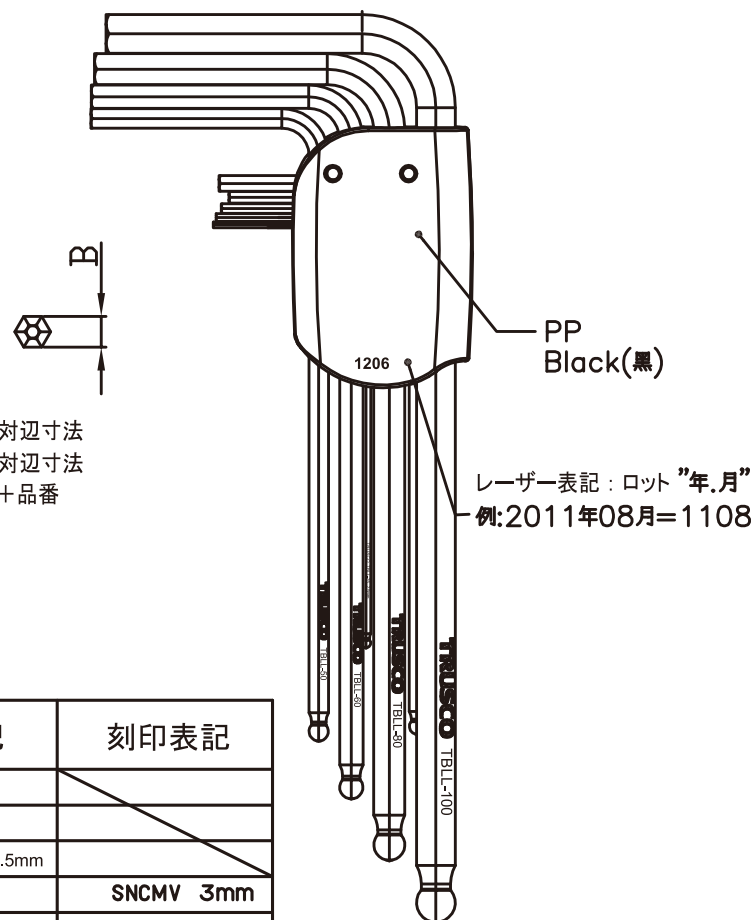


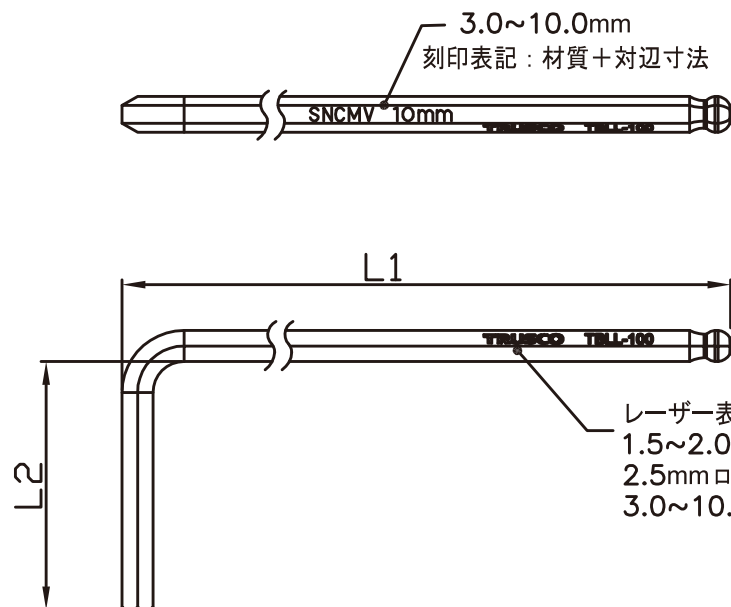

品番	対辺寸法	B		L1	L2	硬度	標準トルク N-M	ボールポイント部 トルク (min)	レーザー表記	刻印表記
		max	min							
TBLL-15	1.5	1.50	1.48	90.0	28.0	55~60°	1.0	0.5	TRUSCO 1.5mm	
TBLL-20	2.0	2.00	1.96	100.0	32.0		2.1	1.1	TRUSCO 2.0mm	
TBLL-25	2.5	2.50	2.46	112.0	36.0		4.7	2.5	TRUSCO TBLL-25 2.5mm	
TBLL-30	3.0	3.00	2.96	126.0	40.0		7.7	4.2	TRUSCO TBLL-30	SNCMV 3mm
TBLL-40	4.0	4.00	3.95	140.0	50.0		17.8	9.7	TRUSCO TBLL-40	SNCMV 4mm
TBLL-50	5.0	5.00	4.95	160.0	56.0		35.0	19.2	TRUSCO TBLL-50	SNCMV 5mm
TBLL-60	6.0	6.00	5.95	180.0	64.0		57.0	31.3	TRUSCO TBLL-60	SNCMV 6mm
TBLL-80	8.0	8.00	7.94	200.0	72.0		126.0	69.3	TRUSCO TBLL-80	SNCMV 8mm
TBLL-100	10.0	10.00	9.94	224.0	80.0		252.0	138.6	TRUSCO TBLL-100	SNCMV 10mm

単位：mm