



品番	刃径 ϕD	有効長 L_e	全長 L	シャンク径 ϕd
TCD-SDS-34	3.4	45	110	3.3
TCD-SDS-34L	3.4	100	160	3.3
TCD-SDS-35	3.5	45	110	3.3
TCD-SDS-35L	3.5	100	160	3.3
TCD-SDS-40	4.0	45	110	3.7
TCD-SDS-43	4.3	45	110	4.0
TCD-SDS-43L	4.3	100	160	4.0
TCD-SDS-45	4.5	45	110	4.2
TCD-SDS-45L	4.5	100	160	4.2
TCD-SDS-48	4.8	45	110	4.4
TCD-SDS-50	5.0	45	110	4.6
TCD-SDS-50L	5.0	100	160	4.6
TCD-SDS-53	5.3	45	110	4.8
TCD-SDS-53L	5.3	100	160	4.8
TCD-SDS-55	5.5	45	110	5.0
TCD-SDS-55L	5.5	100	160	5.0
TCD-SDS-60	6.0	45	110	5.5
TCD-SDS-60L	6.0	100	160	5.5
TCD-SDS-64	6.4	45	110	6.0
TCD-SDS-64L	6.4	100	160	6.0

品番	刃径 ϕD	有効長 L_e	全長 L	シャンク径 ϕd
TCD-SDS-65	6.5	100	160	6.0
TCD-SDS-70	7.0	100	160	6.5
TCD-SDS-75	7.5	100	160	7.0
TCD-SDS-80	8.0	100	160	7.5
TCD-SDS-85	8.5	100	160	7.8
TCD-SDS-90	9.0	100	160	8.0
TCD-SDS-95	9.5	100	160	8.5
TCD-SDS-100	10.0	100	160	9.0
TCD-SDS-105	10.5	100	160	9.5
TCD-SDS-110	11.0	100	160	9.8
TCD-SDS-120	12.0	100	160	11.0
TCD-SDS-125	12.5	100	160	11.0
TCD-SDS-127	12.7	100	160	11.0
TCD-SDS-130	13.0	100	160	12.0
TCD-SDS-140	14.0	100	160	13.0
TCD-SDS-143	14.3	100	160	13.0
TCD-SDS-145	14.5	100	160	13.0
TCD-SDS-150	15.0	100	160	13.0
TCD-SDS-160	16.0	100	160	14.0
TCD-SDS-165	16.5	100	160	15.0
TCD-SDS-170	17.0	100	160	15.0
TCD-SDS-175	17.5	100	160	16.0
TCD-SDS-180	18.0	100	160	16.0


品番	刃径 ϕD	有効長 L_e	全長 L	シャンク径 ϕd	備考
TCD-SDS-343P	3.4	45	110	3.3	3本組み
TCD-SDS-34L3P	3.4	100	160	3.3	3本組み
TCD-SDS-353P	3.5	45	110	3.3	3本組み
TCD-SDS-35L3P	3.5	100	160	3.3	3本組み
TCD-SDS-433P	4.3	45	110	4.0	3本組み
TCD-SDS-43L3P	4.3	100	160	4.0	3本組み
TCD-SDS-503P	5.0	45	110	4.6	3本組み
TCD-SDS-603P	6.0	45	110	5.5	3本組み

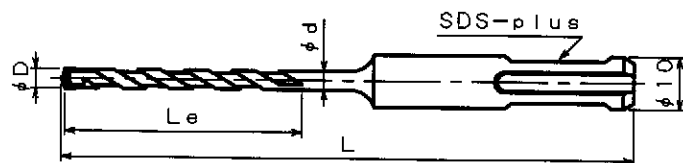

TT3. 4×110BP~TT6. 4×110BP

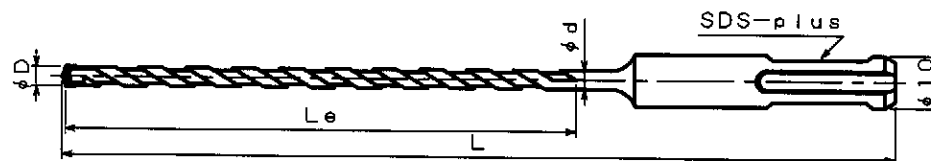

TT3. 4×160BP~TT11. 0×160BP

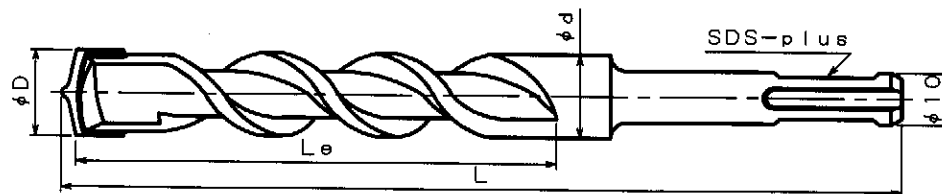

TT12. 0×160BP~TT18. 0×160BP

作成日 2012. 04. 26	校閲 盛田	TRUSCO トラスコ中山株式会社	品名 軽量ハンマードリル用 コンクリートドリル (SDSシャンク)	品番 上記表参照	Scale Free
---------------------	----------	-------------------	--------------------------------------	-------------	---------------