

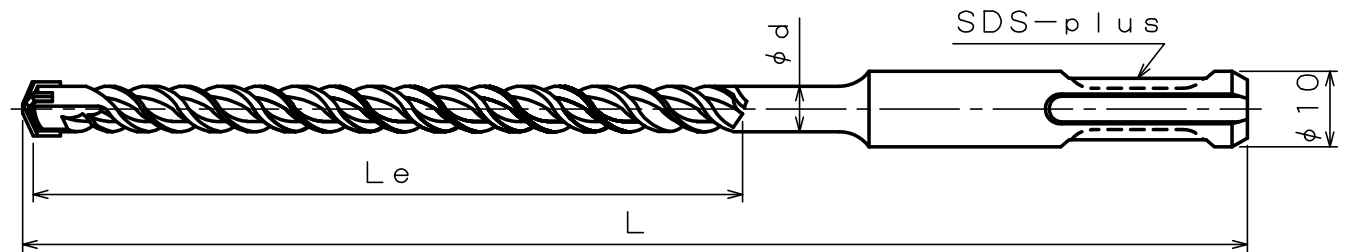


品番	刃径 ϕD	有効長 L_e	全長 L	シャンク径 ϕd
TCD-SDSUX-64	6.4	100	160	6.0
TCD-SDSUX-70	7.0	100	160	6.5
TCD-SDSUX-75	7.5	100	160	7.0
TCD-SDSUX-80	8.0	100	160	7.5
TCD-SDSUX-85	8.5	100	160	7.8
TCD-SDSUX-90	9.0	100	160	8.0
TCD-SDSUX-95	9.5	100	160	8.5
TCD-SDSUX-100	10.0	100	160	9.0
TCD-SDSUX-105	10.5	100	160	9.5
TCD-SDSUX-110	11.0	100	160	9.8
TCD-SDSUX-120	12.0	100	160	11.0
TCD-SDSUX-125	12.5	100	160	11.0
TCD-SDSUX-127	12.7	100	160	11.0
TCD-SDSUX-130	13.0	100	160	12.0
TCD-SDSUX-140	14.0	100	160	13.0
TCD-SDSUX-145	14.5	100	160	13.0
TCD-SDSUX-150	15.0	100	160	13.0
TCD-SDSUX-160	16.0	100	160	14.0
TCD-SDSUX-165	16.5	100	160	15.0
TCD-SDSUX-170	17.0	100	160	15.0
TCD-SDSUX-180	18.0	100	160	16.0

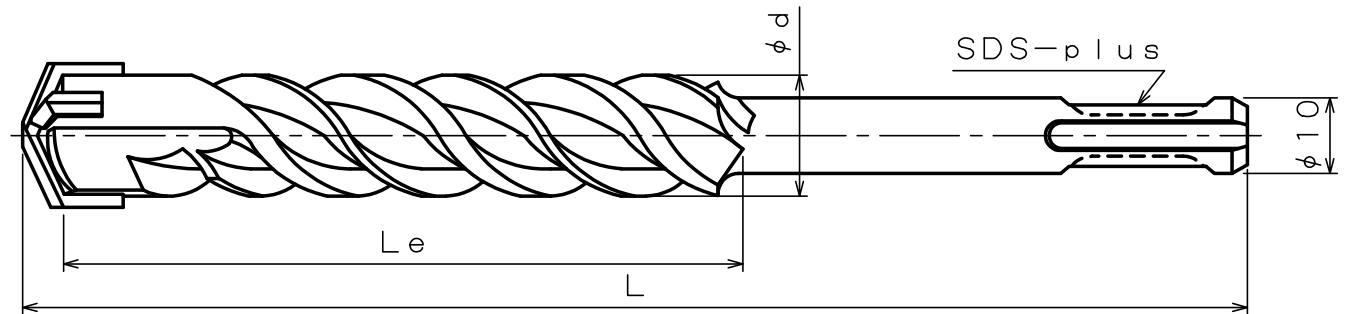

SDSUX6.4~SDSUX11.0



SDSUX12.0~SDSUX18.0

作成日
2012.04.26

検図
盛田

TRUSCO トラスコ中山株式会社

品名 軽量ハンマードリル用
コンクリートドリル SDS-UX

品番
上記表参照

Scale
Free