


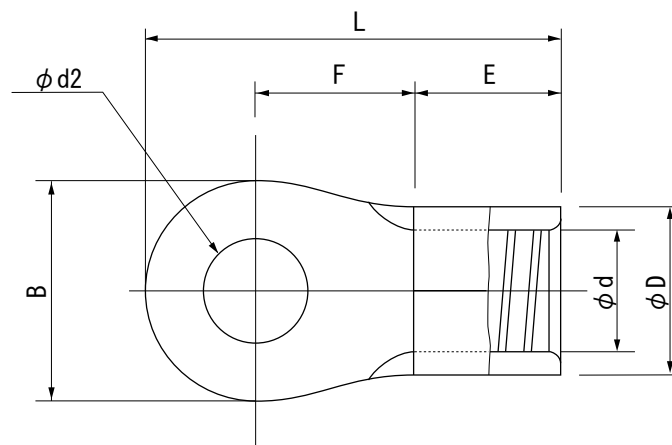

	$\Phi d2$	B	L	F	E	ΦD	Φd	板厚
T-R22-6	6.4	16.5	33.3	13.05	12.0	11.5	7.7	1.8
T-R22-6S	6.4	11.8	31.4	13.50	12.0	11.5	7.7	1.8
T-R22-8	8.4	16.5	33.3	13.05	12.0	11.5	7.7	1.8
T-R22-8S	8.4	11.8	31.4	13.50	12.0	11.5	7.7	1.8
T-R22-10	10.5	17.5	36.3	15.55	12.0	11.5	7.7	1.8
T-R38-8	8.4	22.0	42.3	18.30	13.0	13.3	9.4	1.9
T-R38-8S	8.4	15.3	39.0	18.35	13.0	13.3	9.4	1.9
T-R38-10	10.5	22.0	42.3	18.30	13.0	13.3	9.4	1.9
T-R60-8	8.4	22.0	48.5	19.00	18.5	15.5	11.4	2.0
T-R60-10	10.5	22.0	48.5	19.00	18.5	15.5	11.4	2.0

作成日
2009. 9. 1

検図
中林

TRUSCO トラスコ中山株式会社

品名
裸圧着端子丸型

品番
T-ROO-O