
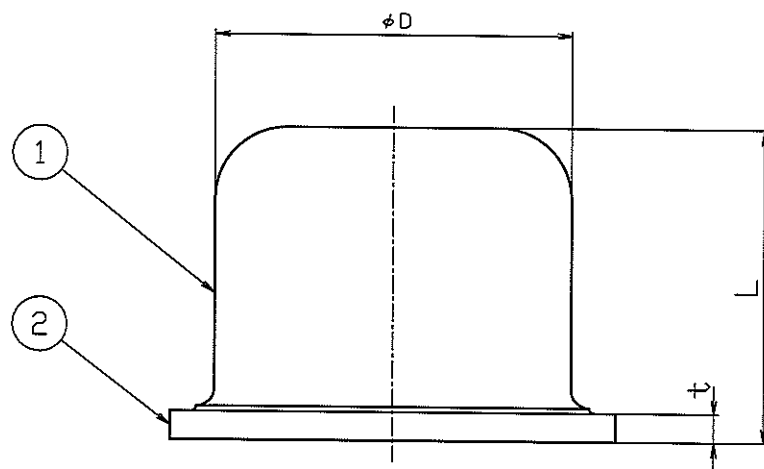


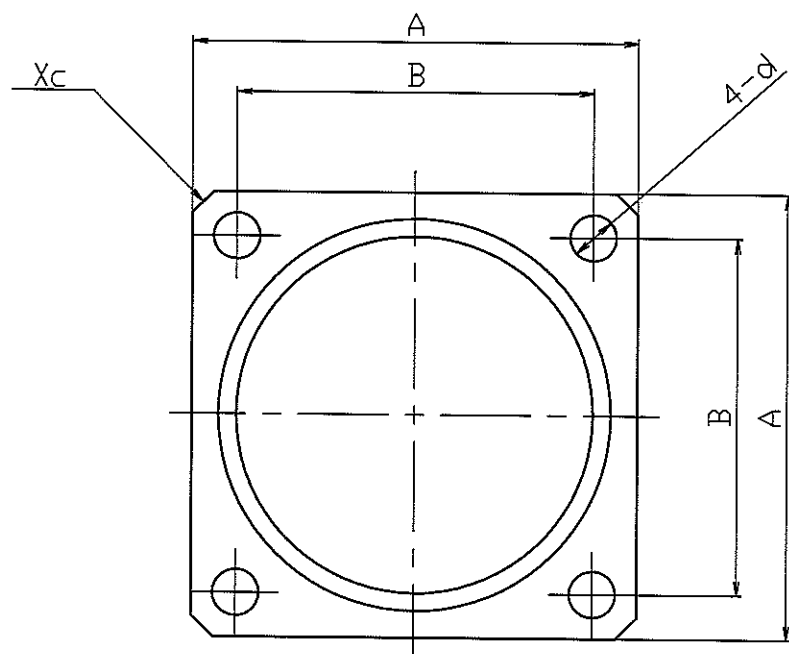

| 製品寸法  | A   | B   | t  | X   | d   | D   | L   |
|-------|-----|-----|----|-----|-----|-----|-----|
| TS101 | 50  | 40  | 3  | 2.5 | 5.5 | 40  | 35  |
| TS102 | 80  | 63  | 6  | 4   | 6.5 | 63  | 56  |
| TS103 | 100 | 80  | 6  | 5   | 13  | 80  | 69  |
| TS104 | 125 | 100 | 8  | 6   | 13  | 100 | 88  |
| TS105 | 160 | 125 | 8  | 10  | 17  | 125 | 108 |
| TS106 | 200 | 160 | 10 | 10  | 17  | 160 | 135 |
| TS107 | 250 | 200 | 10 | 10  | 21  | 200 | 170 |
| TS108 | 315 | 250 | 12 | 16  | 21  | 240 | 212 |

| 特性値   | 反力<br>(N) | ストローク<br>(mm) | 吸収エネルギー<br>(J) |
|-------|-----------|---------------|----------------|
| TS101 | 7850      | 16            | 31.5           |
| TS102 | 24500     | 25            | 155            |
| TS103 | 39000     | 32            | 355            |
| TS104 | 61500     | 40            | 785            |
| TS105 | 98000     | 50            | 1750           |
| TS106 | 155000    | 63            | 3900           |
| TS107 | 245000    | 80            | 8800           |
| TS108 | 390000    | 100           | 12500          |