

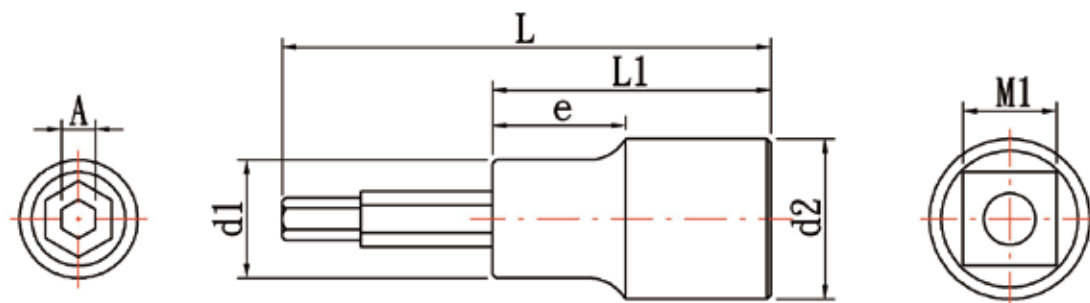
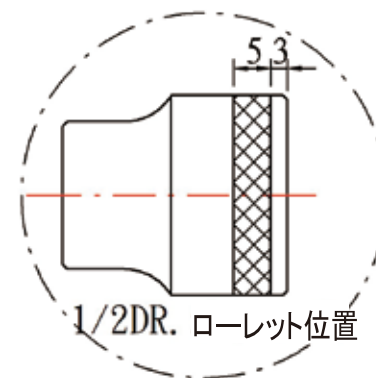


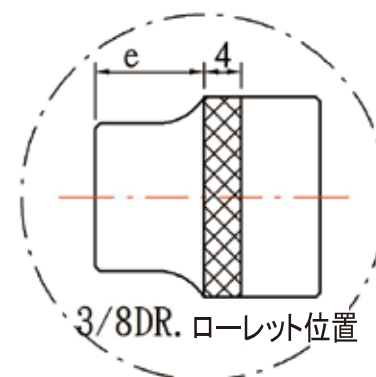

品番	M1	A	d1 ±0.3	d2 ±0.3	L1 ±0.5	e ±2	L ±2	HRC(min)	Torque(N·m) (min)
TS2-02H	6.405-6.625	1.96-2.00	10.2	11.8	19	7	36	52	1.9
TS2-2.5H	6.405-6.625	2.46-2.50	10.2	11.8	19	7	36	52	3.8
TS2-03H	6.405-6.625	2.96-3.00	10.2	11.8	19	7	36	52	6.6
TS2-04H	6.405-6.625	3.95-4.00	10.2	11.8	19	7	40	52	16
TS2-05H	6.405-6.625	4.95-5.00	10.2	11.8	19	7	44	52	30
TS2-06H	6.405-6.625	5.95-6.00	10.2	11.8	19	7	48	52	52
TS2-08H	6.405-6.625	7.94-8.00	10.2	11.8	19	7	52	50	120
TS3-2.5H	9.580-9.800	2.46-2.50	13.0	17.8	26	12	44	52	3.8
TS3-03H	9.580-9.800	2.96-3.00	13.0	17.8	26	12	44	52	6.6
TS3-04H	9.580-9.800	3.95-4.00	13.0	17.8	26	12	47	52	16
TS3-05H	9.580-9.800	4.95-5.00	13.0	17.8	26	12	50	52	30
TS3-06H	9.580-9.800	5.95-6.00	13.0	17.8	26	12	52	52	52
TS3-08H	9.580-9.800	7.94-8.00	14.0	17.8	26	12	55	50	120
TS3-10H	9.580-9.800	9.94-10.00	16.0	17.8	26	12	55	48	220
TS3-12H	9.580-9.800	11.89-12.00	16.0	17.8	26	12	55	48	370
TS4-03H	12.755-13.025	2.96-3.00	14.0	21.8	38	18	55	52	6.6
TS4-04H	12.755-13.025	3.95-4.00	14.0	21.8	38	18	55	52	16
TS4-05H	12.755-13.025	4.95-5.00	14.0	21.8	38	18	55	52	30
TS4-06H	12.755-13.025	5.95-6.00	14.0	21.8	38	18	57	52	52
TS4-08H	12.755-13.025	7.94-8.00	16.0	21.8	38	18	59	50	120
TS4-10H	12.755-13.025	9.94-10.00	17.8	21.8	38	18	59	48	220
TS4-12H	12.755-13.025	11.89-12.00	19.8	21.8	38	18	68	48	370
TS4-14H	12.755-13.025	13.89-14.00	21.8	23.8	38	18	69	48	590
TS4-17H	12.755-13.025	16.89-17.00	—	25.8	38	—	72	45	1000
TS4-19H	12.755-13.025	18.87-19.00	—	25.8	38	—	72	45	1400
TS4-22H	12.755-13.025	21.87-22.00	—	29.8	38	—	72	45	2100

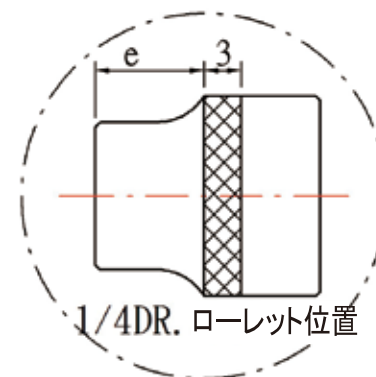

単位 : mm