



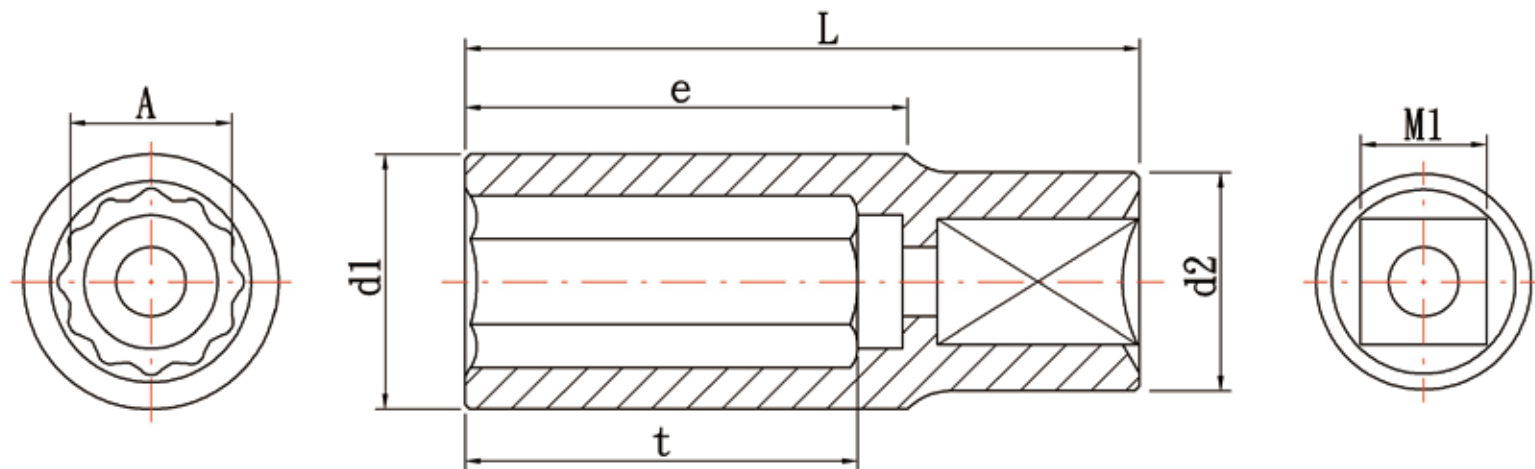

品番	M1	A	d1 ±0.3	d2 ±0.3	L ±0.5	t ±2	e ±2
TS3-12WL	9.580-9.800	12.04-12.24	16.8	15.6	63	28	45
TS3-13WL	9.580-9.800	13.04-13.24	17.8	16.2	63	28	45
TS3-14WL	9.580-9.800	14.05-14.27	19.8	18.0	63	28	45
TS3-17WL	9.580-9.800	17.05-17.30	23.8	21.0	63	28	45
TS3-19WL	9.580-9.800	19.06-19.36	25.8	22.0	63	28	45
TS3-24WL	9.580-9.800	24.06-24.36	31.8	28.0	63	28	45

硬度 : HRC 38-55

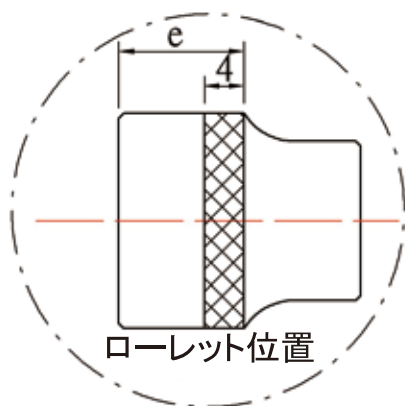

単位 : mm