



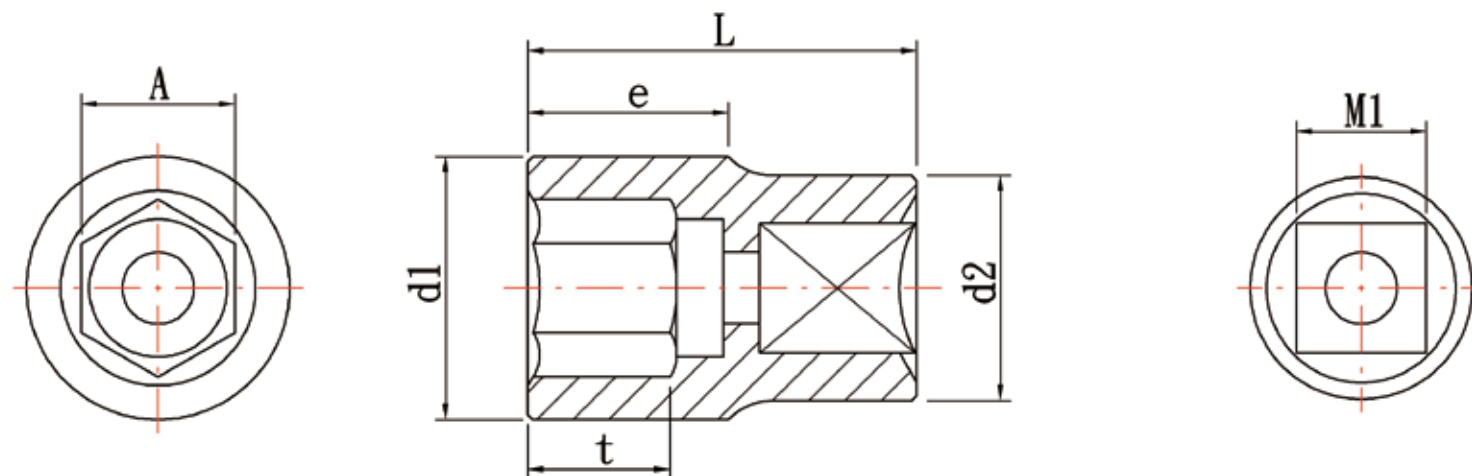

品番	M1	A	d1 ±0.3	d2 ±0.3	L ±0.5	t (min)	e ±2
TS3-12S	9.580-9.800	12.04-12.24	16.8	15.8	28	8	16
TS3-13S	9.580-9.800	13.04-13.24	17.8	16.3	28	8	16
TS3-14S	9.580-9.800	14.05-14.27	19.8	17.0	28	11	16
TS3-17S	9.580-9.800	17.05-17.30	23.8	20.0	30	11	18
TS3-19S	9.580-9.800	19.06-19.36	25.8	23.0	30	13	18
TS3-24S	9.580-9.800	24.06-24.36	31.8	28.0	30	15	18

硬度 : HRC 38-55

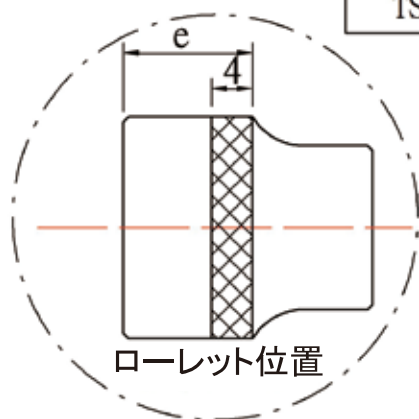

単位 : mm