



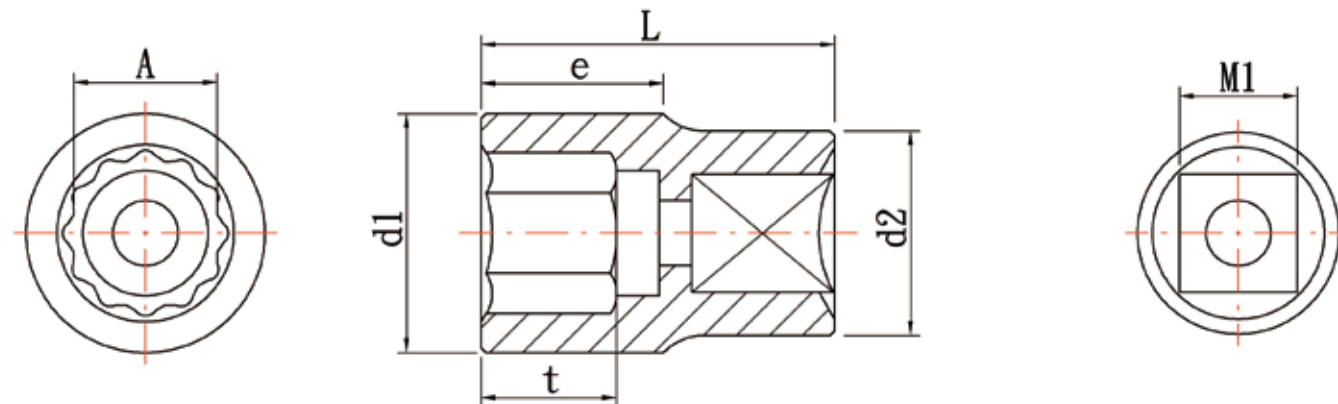

品番	M1	A	d1 ±0.3	d2 ±0.3	L ±0.5	t (min)	e ±2
TS4-15W	12.755-13.025	15.05-15.27	21.8	20.7	38	11	21
TS4-16W	12.755-13.025	16.05-16.27	21.8	20.7	38	11	21
TS4-17W	12.755-13.025	17.05-17.30	23.8	22.0	38	11	21
TS4-18W	12.755-13.025	18.05-18.30	25.8	23.0	38	13	21
TS4-19W	12.755-13.025	19.06-19.36	25.8	23.0	38	13	21
TS4-21W	12.755-13.025	21.06-21.36	27.8	25.0	38	13	21
TS4-22W	12.755-13.025	22.06-22.36	29.8	26.0	38	15	21
TS4-23W	12.755-13.025	23.06-23.36	31.8	27.0	38	15	21
TS4-24W	12.755-13.025	24.06-24.36	31.8	28.0	38	15	21
TS4-25W	12.755-13.025	25.06-25.36	33.8	30.0	42	17	25
TS4-26W	12.755-13.025	26.08-26.48	33.8	30.0	42	17	25
TS4-27W	12.755-13.025	27.08-27.48	35.8	30.0	42	17	25
TS4-29W	12.755-13.025	29.08-29.48	37.8	32.0	42	17	25
TS4-30W	12.755-13.025	30.08-30.48	39.8	34.0	46	21	29
TS4-32W	12.755-13.025	32.08-32.48	41.8	36.0	46	22	29
TS4-36W	12.755-13.025	36.10-36.60	47.8	42.0	46	22	29

硬度：HRC 38-55

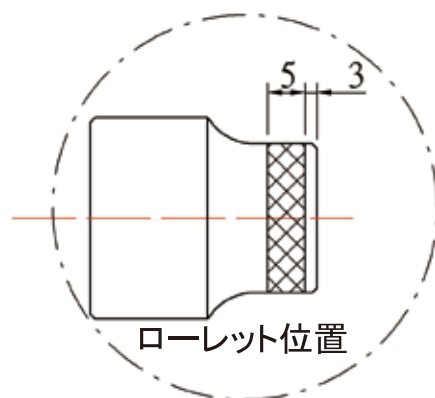

単位：mm

作成日 2012.12.18

検図 商品部

TRUSCO トラスコ中山株式会社

品名 ソケット (12角)

品番 TS4-〇〇W