


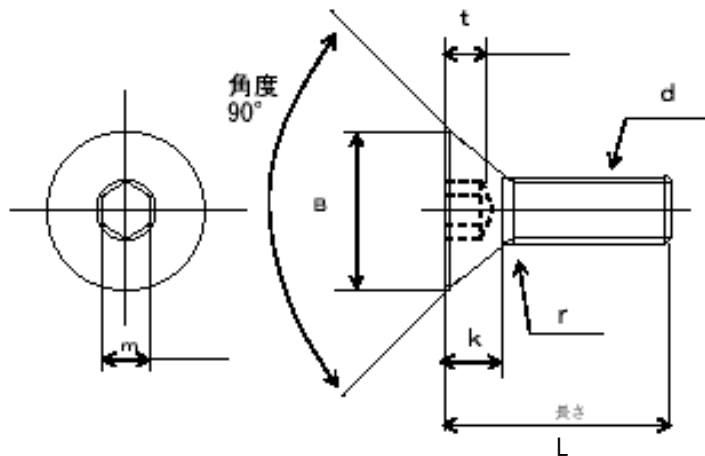

材質：クロムモリブデン鋼（S C M 4 3 5）
 表面处理：酸化鉄皮膜
 強度：1 0 . 9

品番	ねじの呼び d	長さ L	ピッチ	B	k	m	t	r	品番	ねじの呼び d	長さ L	ピッチ	B	k	m	t	r
B73-0614	M6	14	1	12	3.3	4	2.5	0.3	B73-0845	M8	45	1.25	16	4.4	5	3.5	0.5
B73-0615	M6	15	1	12	3.3	4	2.5	0.3	B73-0850	M8	50	1.25	16	4.4	5	3.5	0.5
B73-0616	M6	16	1	12	3.3	4	2.5	0.3	B73-1015	M10	15	1.5	20	5.5	6	4.4	0.5
B73-0618	M6	18	1	12	3.3	4	2.5	0.3	B73-1018	M10	18	1.5	20	5.5	6	4.4	0.5
B73-0620	M6	20	1	12	3.3	4	2.5	0.3	B73-1020	M10	20	1.5	20	5.5	6	4.4	0.5
B73-0622	M6	22	1	12	3.3	4	2.5	0.3	B73-1025	M10	25	1.5	20	5.5	6	4.4	0.5
B73-0625	M6	25	1	12	3.3	4	2.5	0.3	B73-1030	M10	30	1.5	20	5.5	6	4.4	0.5
B73-0630	M6	30	1	12	3.3	4	2.5	0.3	B73-1035	M10	35	1.5	20	5.5	6	4.4	0.5
B73-0635	M6	35	1	12	3.3	4	2.5	0.3	B73-1040	M10	40	1.5	20	5.5	6	4.4	0.5
B73-0640	M6	40	1	12	3.3	4	2.5	0.3	B73-1045	M10	45	1.5	20	5.5	6	4.4	0.5
B73-0645	M6	45	1	12	3.3	4	2.5	0.3	B73-1050	M10	50	1.5	20	5.5	6	4.4	0.5
B73-0650	M6	50	1	12	3.3	4	2.5	0.3	B73-1220	M12	20	1.75	24	6.5	8	4.6	1
B73-0812	M8	12	1.25	16	4.4	5	3.5	0.5	B73-1225	M12	25	1.75	24	6.5	8	4.6	1
B73-0815	M8	15	1.25	16	4.4	5	3.5	0.5	B73-1230	M12	30	1.75	24	6.5	8	4.6	1
B73-0816	M8	16	1.25	16	4.4	5	3.5	0.5	B73-1235	M12	35	1.75	24	6.5	8	4.6	1
B73-0818	M8	18	1.25	16	4.4	5	3.5	0.5	B73-1240	M12	40	1.75	24	6.5	8	4.6	1
B73-0820	M8	20	1.25	16	4.4	5	3.5	0.5	B73-1245	M12	45	1.75	24	6.5	8	4.6	1
B73-0825	M8	25	1.25	16	4.4	5	3.5	0.5	B73-1250	M12	50	1.75	24	6.5	8	4.6	1
B73-0830	M8	30	1.25	16	4.4	5	3.5	0.5	B73-1255	M12	55	1.75	24	6.5	8	4.6	1
B73-0835	M8	35	1.25	16	4.4	5	3.5	0.5	B73-1260	M12	60	1.75	24	6.5	8	4.6	1
B73-0840	M8	40	1.25	16	4.4	5	3.5	0.5									

作成日 2008. 1. 15	検図 中田	TRUSCO トラスコ中山株式会社	品名 六角穴付皿ボルト	品番 B 7 3 - 〇 〇 〇 〇
--------------------	----------	-------------------	----------------	-----------------------