

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]				
	ENGLISH	METRIC	L ± .03 [0,51]	W ± .01 [0,25]	C ± .02 [0,38]	M ± .03 [0,51]	H ± .01 [0,25]
EV10-6FB	#6	M3	1.01 [25,65]	.31 [7,87]	.25 [6,35]	.81 [20,57]	.14 [3,56]
EV10-8FB	#8	M4	1.04 [26,42]	.37 [9,40]	.25 [6,35]	.81 [20,57]	.17 [4,32]
EV10-10FB	#10	M5	1.04 [26,42]	.37 [9,40]	.25 [6,35]	.81 [20,57]	.20 [5,08]
EV10-14FB	1/4"	M6	1.14 [28,96]	.49 [12,45]	.32 [8,13]	.88 [22,35]	.26 [6,60]


UL & CSA TOOLS (DIES)

CT-100A*
CT-600-A (CT-550CH)
CT-1550
CT-1551
CT-2500 (CT-2550CH)

*RATED FOR 300V, 75°C

PANDUIT APPROVED TOOLS

CT-160
CT-260
CT-400
CT-460

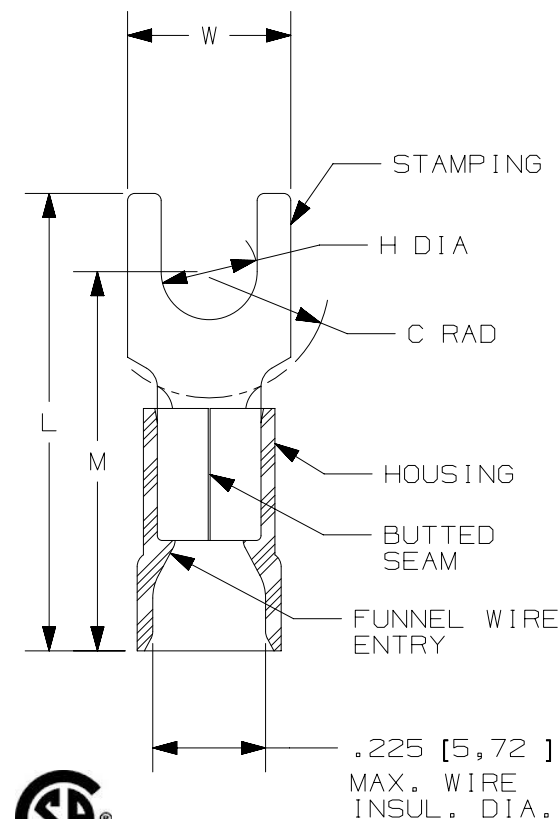

NOTES:

- UL LISTED & CSA CERTIFIED FOR:
 - 12-10 AWG [4,0-6,0 mm²] SOLID OR STRANDED COPPER WIRE
 - 221°F [105°C] MAX. OPERATING TEMPERATURE
 - 600V. MAX. BLDG WIRE
(1000 V. MAX. IN SIGNS, FIXTURES & LUMINAIRES)

- MATERIAL:
 - STAMPING: .040" [1,02] THK COPPER, TIN PLATED
 - HOUSING: VINYL, YELLOW

- WIRE STRIP LENGTH: 5/16" ^{+1/32}₋₀ [7,9mm ^{+0,8}₋₀]

- SEE www.panduit.com FOR PACKAGE QUANTITIES

- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT



LISTED
587H
E52164



CERTIFIED
LR31212

TITLE			
STRONGHOLD FORK TERMINAL VINYL INSULATED, BUTTED SEAM #12-10 AWG			
CUSTOMER DRAWING			
ITEM REVISION NAME		00123SHN/00	
DATASET FILE NAME		00123SHN-DC/00	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL:	
.X ± .XX ±		.XXX ± ANGLES ±	
THIRD ANGLE PROJECTION		SEE NOTES	
DRAWN BY JHNU		DATE 2/18	
CHK TMR		SCALE N.T.S.	
DRAWING NUMBER: SH41189		SHEET 1 OF 1	
REV		A	