


2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

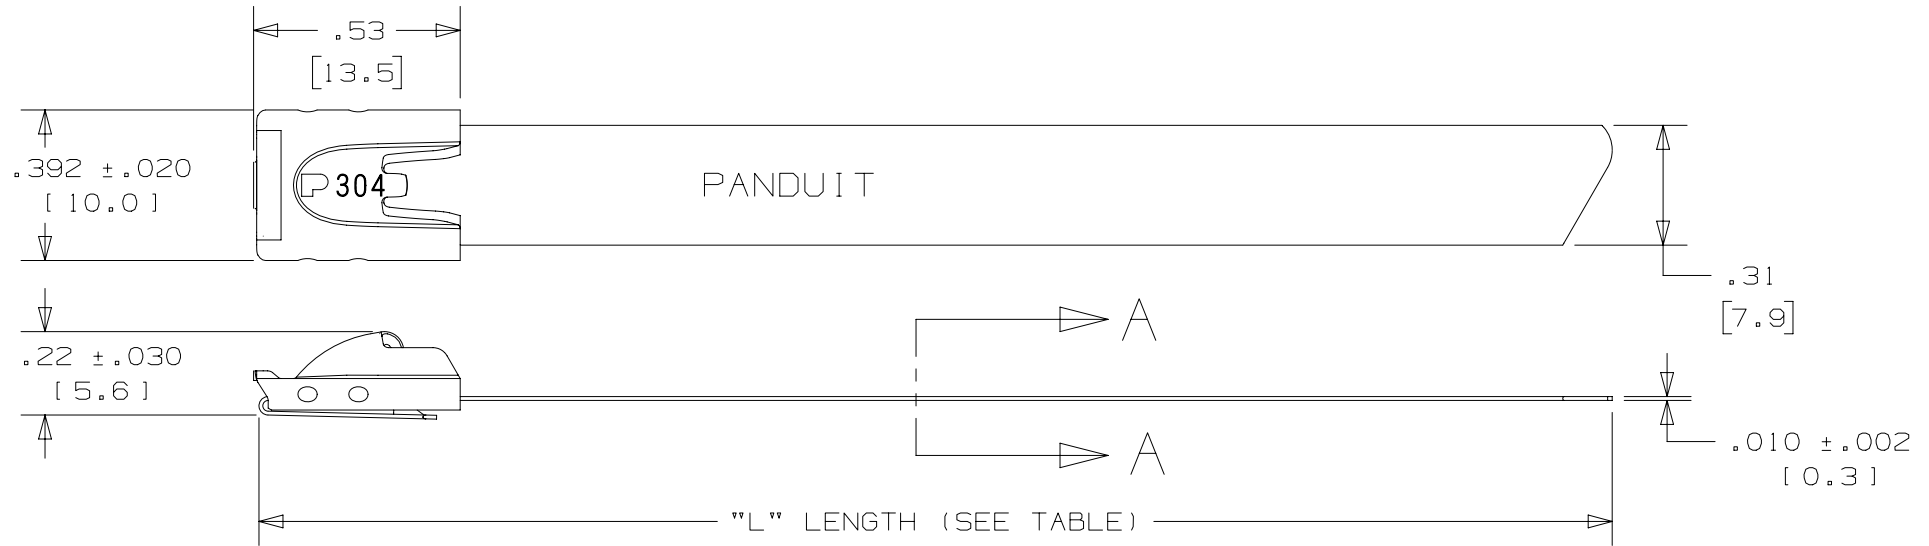

ROUNDED EDGES ALONG
STRAP BODY


SECTION A-A

SCALE 6:1

NOTES:

1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 200 LBS. (890 NEWTONS)
WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [] DENOTE DIMENSIONS IN MILLIMETERS.
4. TOLERANCES:
.XXX = ±.010 [.25] .XX = ±.02 [.5]
.X = ±.03 [.8] ANGLES = ±2°
5. MATERIAL: 304 STAINLESS STEEL

PANDUIT PART NO.	PACKAGE QTY	MAX BUNDLE DIAMETER	LENGTH "L" ±.3 [7]
IMLT51H-L	50	2" [51]	7.9" [201]
IMLT69H-L	50	2.7" [69]	10.2" [259]
IMLT102H-L	50	4" [102]	14.3" [362]
IMLT152H-L	50	6" [152]	20.5" [521]
IMLT203H-L	50	8" [203]	26.8" [679]
IMLT254H-L	50	10" [254]	33.0" [838]
IMLT304H-Q	25	12" [304]	39.3" [998]
IMLT355H-Q	25	14" [355]	45.5" [1156]

							TITLE						
							IMLT HEAVY SINGLE LOOP ASSEMBLY 304 STAINLESS STEEL						
							CUSTOMER DRAWING						
							ITEM REVISION NAME 15L355BD/02						
							DATASET FILE NAME 15L355BD_DC/02						
02	03-04-16	JSUN	JSUN	RGRO	WAS CONTROL DRAWING IN TITLE BLOCK	LPECN_15L355BD_DC/02	UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]				MATERIAL: 304 STAINLESS STEEL		
01	01-28-16	JSUN	JSUN	RGRO	LOOP TENSILE STRENGTH WAS 225 LBS	LPECN_15L355BD_DC/01	.X ± .XXX ± .XX ± ANGLES ±				DRAWING NUMBER: 15L355BD_DC		
00	01-18-16	JSUN	JSUN	RGRO	INITIAL RELEASE	LPECN_15L355BD_DC/00	 THIRD ANGLE PROJECTION						
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY/DATE JSUN 1/16		CHK JSUN	SCALE 2:1	SHT 1 OF 1		SIZE A

2

1