


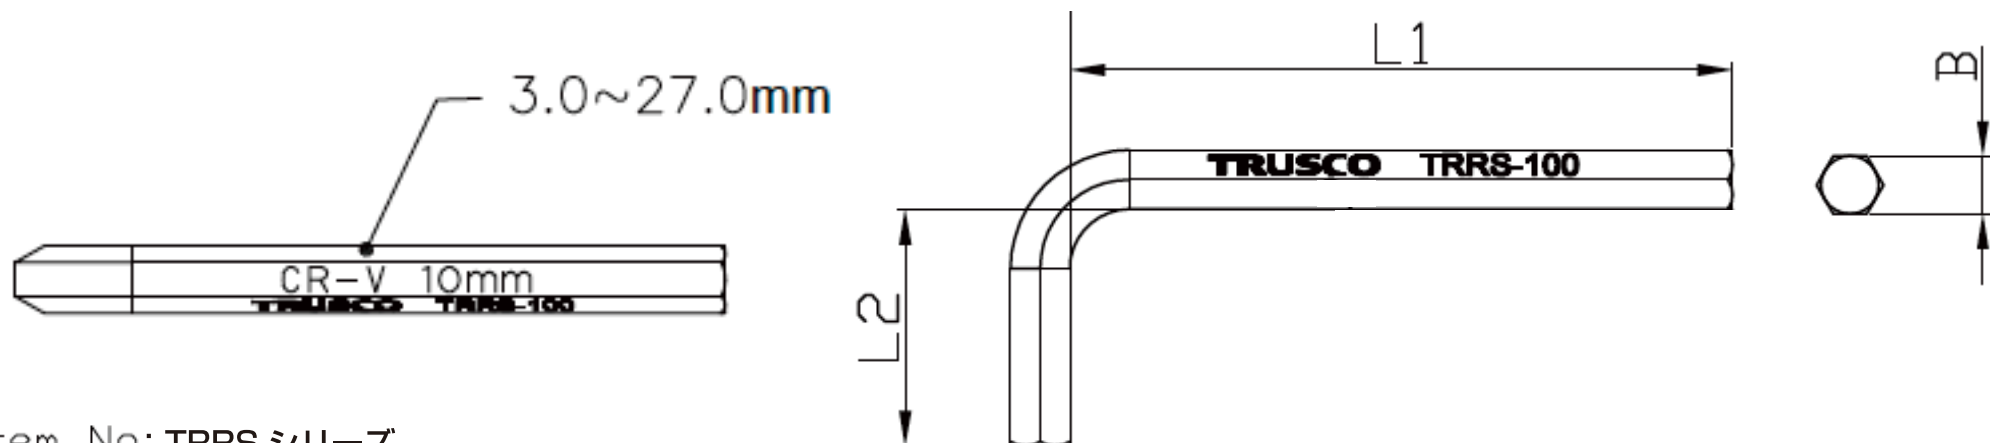

Item No: TRRS シリーズ

Item No.	Size	B		L1	L2	硬度 HRC	トルク N-M (min)	レーザー内容	刻印内容
		max	min						
TRRS-15	1.5	1.50	1.48	45.0	14.0	52~58°	1.0	TRUSCO 1.5mm	
TRRS-20	2.0	2.00	1.96	50.0	16.0		2.1	TRUSCO 2.0mm	
TRRS-25	2.5	2.50	2.46	56.0	18.0		4.7	TRUSCO TRRS-25 2.5mm	
TRRS-30	3.0	3.00	2.96	63.0	20.0		7.7	TRUSCO TRRS-30	CR-V 3mm
TRRS-40	4.0	4.00	3.95	70.0	25.0		17.8	TRUSCO TRRS-40	CR-V 4mm
TRRS-45	4.5	4.50	4.45	75.0	26.0		26.0	TRUSCO TRRS-45	CR-V 4.5mm
TRRS-50	5.0	5.00	4.95	80.0	28.0		35.0	TRUSCO TRRS-50	CR-V 5mm
TRRS-55	5.5	5.50	5.45	85.0	30.0		46.0	TRUSCO TRRS-55	CR-V 5.5mm
TRRS-60	6.0	6.00	5.95	90.0	32.0		57.0	TRUSCO TRRS-60	CR-V 6mm
TRRS-70	7.0	7.00	6.94	95.0	34.0		88.0	TRUSCO TRRS-70	CR-V 7mm
TRRS-80	8.0	8.00	7.94	100.0	36.0	50~58°	126.0	TRUSCO TRRS-80	CR-V 8mm
TRRS-100	10.0	10.00	9.94	112.0	40.0		252.0	TRUSCO TRRS-100	CR-V 10mm
TRRS-120	12.0	12.00	11.89	125.0	45.0	48~53°	420.0	TRUSCO TRRS-120	CR-V 12mm
TRRS-140	14.0	14.00	13.89	140.0	56.0		670.0	TRUSCO TRRS-140	CR-V 14mm
TRRS-170	17.0	17.00	16.89	160.0	63.0		1180	TRUSCO TRRS-170	CR-V 17mm
TRRS-190	19.0	19.00	18.87	180.0	70.0		1670	TRUSCO TRRS-190	CR-V 19mm
TRRS-220	22.0	22.00	21.87	200.0	80.0		2450	TRUSCO TRRS-220	CR-V 22mm
TRRS-240	24.0	24.00	23.87	224.0	90.0		3200	TRUSCO TRRS-240	CR-V 24mm
TRRS-270	27.0	27.00	26.87	250.0	100.0	45~53°	4300	TRUSCO TRRS-270	CR-V 27mm

単位:mm