
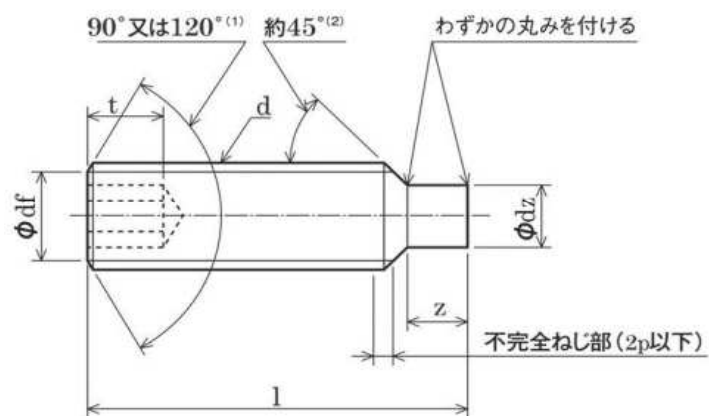




材質: SCM材
表面処理: 黒色酸化被膜

品番	呼び径d	ピッチ	長さ l	φdz (最大)	z (最大)	e (最少)	s	t (最少)
Y1 02-0303	M3	0.5	3	2.0	1.0	1.73	1.5	1.2
Y1 02-0304			4					
Y1 02-0305			5					
Y1 02-0306			6		1.75			2.0
Y1 02-0308			8					
Y1 02-0310			10					
Y1 02-0404	M4	0.7	4	2.5	1.25	2.3	2.0	1.5
Y1 02-0405			5					
Y1 02-0406			6					
Y1 02-0408			8		2.25			2.5
Y1 02-0410			10					
Y1 02-0412			12					
Y1 02-0416			16					
Y1 02-0420			20					
Y1 02-0505	M5	0.8	5	3.5	1.5	2.87	2.5	2.0
Y1 02-0506			6					
Y1 02-0508			8					
Y1 02-0510			10		2.75			3.0
Y1 02-0512			12					
Y1 02-0515			15					
Y1 02-0520	20							
Y1 02-0606	M6	1.0	6	4.0	1.75	3.44	3.0	2.0
Y1 02-0608			8					
Y1 02-0610			10					
Y1 02-0612			12		3.25			3.5
Y1 02-0615			15					
Y1 02-0620			20					
Y1 02-0625			25					
Y1 02-0630			30					

単位: mm

※ df寸法に関してはほぼおねじの谷の径

作成日	作成者	品名	品番
2023.10.10	八幡ねじ	TRUSCO トラスコ中山株式会社 六角穴付き止めねじ棒先スチール	Y102-03**~06**